



PRODUCT CATALOG

LMK1(BH)-0.66

Series Current Transformer



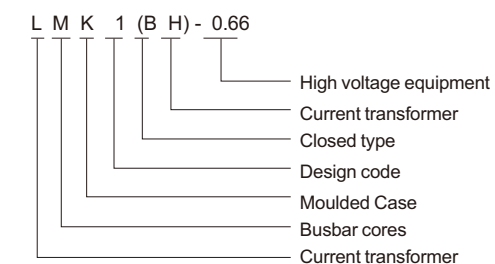
Application


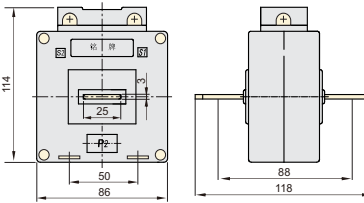
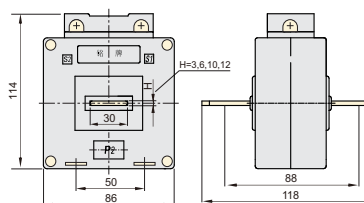
- LMK1(BH)-0.66 type current transformer is mainly used for indoor, for rated voltage up to and including 0.66 kV, rated frequency 50Hz ac circuit as the electric current and electric energy measurement and relay protection. Product is a plastic shell type current transformer, are widely used in the complete sets of cabinet put oneself in another's position, its installation method can be used bus fixed and base plate fixed installation method, suitable for any direction installation, a conductor for bus or cable.
- Standard: IEC 61869

Working environment

1. Installation sites: Indoor
2. Ambient temperature : -5~40℃
3. Ambient humidity: ≤ 80%
4. Altitude: ≤1000m
5. Atmospheric conditions: no serious impurity in the atmosphere.

Code and implication












Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 1	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 LMK1(BH)-0.66 With Bar	5/5	5	5					
	10/5	5	5					
	15/5	5	5					
	20/5	5	5					
	25/5	5	5					
	30/5	5	5					
	40/5	5	5					
	50/5	5	5					
	75/5	5	5					
 LMK1(BH)-0.66 With Bar	5/5			5	5	5		
	10/5			5	5	5		
	15/5			5	5	5		
	20/5			5	5	5		
	25/5			5	5	5		
	30/5			5	5	5		
	40/5			5	5	5		
	50/5			5	5	5		
	75/5			5	5	5		
								

LMK1(BH)-0.66

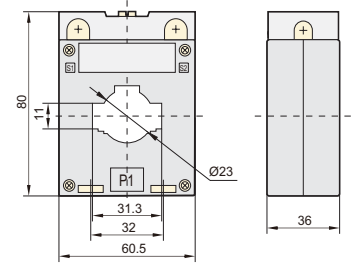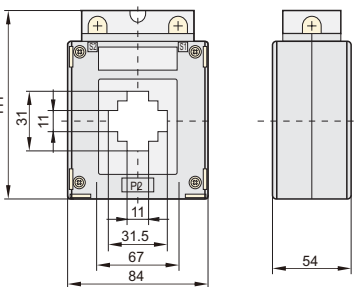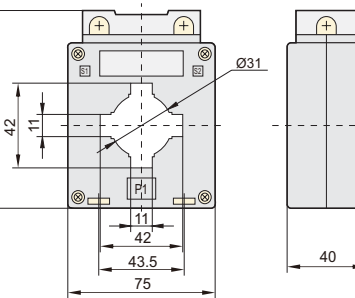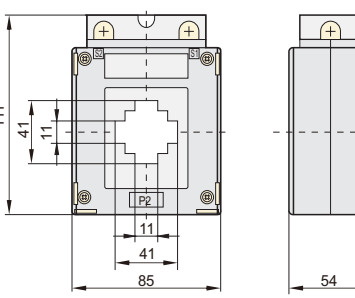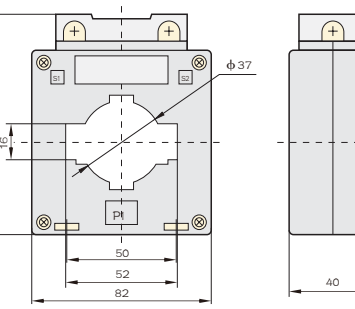Series Current Transformer



Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 1	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 LMK1(BH)-0.66 30	30/5	5	5				5	
	50/5	5	5				3	
	75/5	5	5				2	
	75/5	2.5					1	
	100/5	5	2.5				1	
	100/5	5	5				2	
	150/5	5	2.5				1	
	200/5	5	5				1	
	250/5	5	5				1	
	300/5	5	5				1	
 LMK1(BH)-0.66 30 Type C BH-30 50/5 0.5S 0.2 0.2S	400/5	5	5				1	
 LMK1(BH)-0.66 40	100/5	2.5	2.5	2.5	2.5	2.5	1	
	150/5	5	2.5	2.5	2.5	2.5	1	
	200/5	5	5	5	5	5	1	
	250/5	5	5	5	5	5	1	
	300/5	5	5	5	5	5	1	
	400/5	5	5	5	5	5	1	
	500/5	5	5	5	5	5	1	
	600/5	5	5	5	5	5	1	
	700/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
 LMK1(BH)-0.66 40 Type C BH-40 100/5 0.5S 0.2 0.2S								
 LMK1(BH)-0.66 50	200/5	5	2.5	2.5	2.5	2.5	1	
	250/5	5	5	5	5	5	1	
	300/5	5	5	5	5	5	1	
	400/5	5	5	5	5	5	1	
	500/5	5	5	5	5	5	1	
	600/5	5	5	5	5	5	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	

Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 1	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 LMK1(BH)-0.66 60	300/5	5	5	5	5	5	1	
	400/5	5	5	5	5	5	1	
	500/5	5	5	5	5	5	1	
	600/5	5	5	5	5	5	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
 LMK1(BH)-0.66 80	500/5	5	5	5	5	5	1	
	600/5	5	5	5	5	5	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	10	10	10	10	10	1	
	2500/5	15	15	15	15	15	1	
 LMK1(BH)-0.66 100	600/5	5	5	5	5	5	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	10	10	10	10	10	1	
	2500/5	15	15	15	15	15	1	
	3000/5	20	20	20	20	20	1	

Ordering instructions

When the customer ordering, must provide the following information:

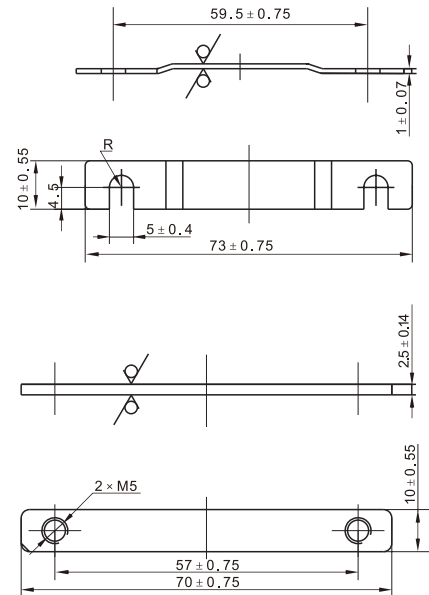
- 1, The product model and window width;
- 2, Rated current ratio;
- 3, Rated output, and the corresponding accurate level;

For example: order LMK1 (BH) - 0.66 type, window width is 30 mm, rated current than 200/5 a and rated output 5 VA, accurate magnitude 0.5 on the Richter scale transformer.

Order, code-named LMK1 (BH) 0.66 Φ 30 200/5 1 turn 5 VA a 0.5 on the Richter scale are unlikely.

- 4, if you have special requirements, can be customized consultation with the manufacturer.

Installation accessories




LMK2(BH)-0.66



Series Current Transformer



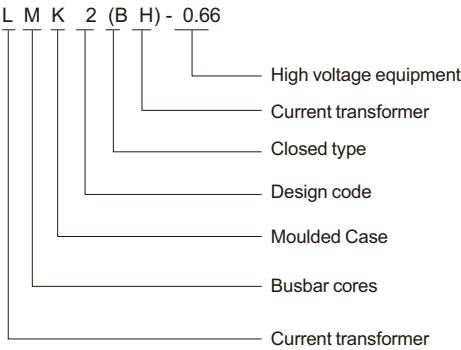Code and implication



Technical parameters and installation size







Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 1	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 LMK2(BH)-0.66 30	30/5	5	5	5	5	5	5	
	50/5	5	5	5	5	5	3	
	75/5	5	5	5	5	5	2	
	75/5	5	5	5	5	5	1	
	100/5	5	5	5	5	5	1	
	100/5	5	5	5	5	5	2	
	150/5	5	5	5	2.5	5	1	
	200/5	5	5	5	5	5	1	
	250/5	5	5	5	5	5	1	
	300/5	5	5	5	5	5	1	
 LMK2(BH)-0.66 40	400/5	5	5	5	5	5	1	
	200/5	5	5	5	5	5	1	
	250/5	5	5	5	5	5	1	
	300/5	5	5	5	5	5	1	
	400/5	5	5	5	5	5	1	
	500/5	5	5	5	5	5	1	
	600/5	5	5	5	5	5	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	

Application

LMK2(BH)-0.66 type current transformer is mainly used for indoor, for rated voltage up to and including 0.66 kV, rated frequency 50Hz ac circuit as the electric current and electric energy measurement and relay protection. Product is a plastic shell type current transformer, are widely used in the complete sets of cabinet put oneself in another's position, its installation method can be used bus fixed and base plate fixed installation method, suitable for any direction installation, a conductor for bus or cable. Standard: IEC 61869

Working environment

1. Installation sites: Indoor
2. Ambient temperature : -5~40 °c
3. Ambient humidity: ≤ 80%
4. Altitude: ≤1000m
5. Atmospheric conditions: no serious impurity in the atmosphere.

Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 1	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 LMK2(BH)-0.66 50	300/5	5	5	5	5	5	1	
	400/5	5	5	5	5	5	1	
	500/5	5	5	5	5	5	1	
	600/5	5	5	5	5	5	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
 LMK2(BH)-0.66 60	400/5	5	5	5	5	5	1	
	500/5	5	5	5	5	5	1	
	600/5	5	5	5	5	5	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
 LMK2(BH)-0.66 80	2000/5	10	10	10	10	10	1	
	600/5	5	5	5	5	5	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	10	10	10	10	10	1	
 LMK2(BH)-0.66 100	2500/5	15	15	15	15	15	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	10	10	10	10	10	1	
	2500/5	15	15	15	15	15	1	
	3000/5	20	20	20	20	20	1	
 LMK2(BH)-0.66 120	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	10	10	10	10	10	1	
	2500/5	15	15	15	15	15	1	
	3000/5	20	20	20	20	20	1	
	4000/5	30	30	30	30	30	1	
	5000/5	40	40	40	40	40	1	
	6000/5	40	40	40	40	40	1	
 LMK2(BH)-0.66 125	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	10	10	10	10	10	1	
	2500/5	15	15	15	15	15	1	
	3000/5	20	20	20	20	20	1	
	4000/5	30	30	30	30	30	1	
	5000/5	40	40	40	40	40	1	
	6000/5	40	40	40	40	40	1	

Ordering instructions

When the customer ordering, must provide the following information:


- 1, The product model and window width;
- 2, Rated current ratio;
- 3, Rated output, and the corresponding accurate level;

For example: order LMK1 (BH) - 0.66 type, window width is 30 mm, rated current than 200/5 a and rated output 5 VA, accurate magnitude 0.5 on the Richter scale transformer.

Order, code-named LMK1 (BH) 0.66 Φ 30 200/5 1 turn 5 VA a 0.5 on the Richter scale are unlikely.


4, if you have special requirements, can be customized consultation with the manufacturer.

Installation accessories




LMK3(BH)-0.66

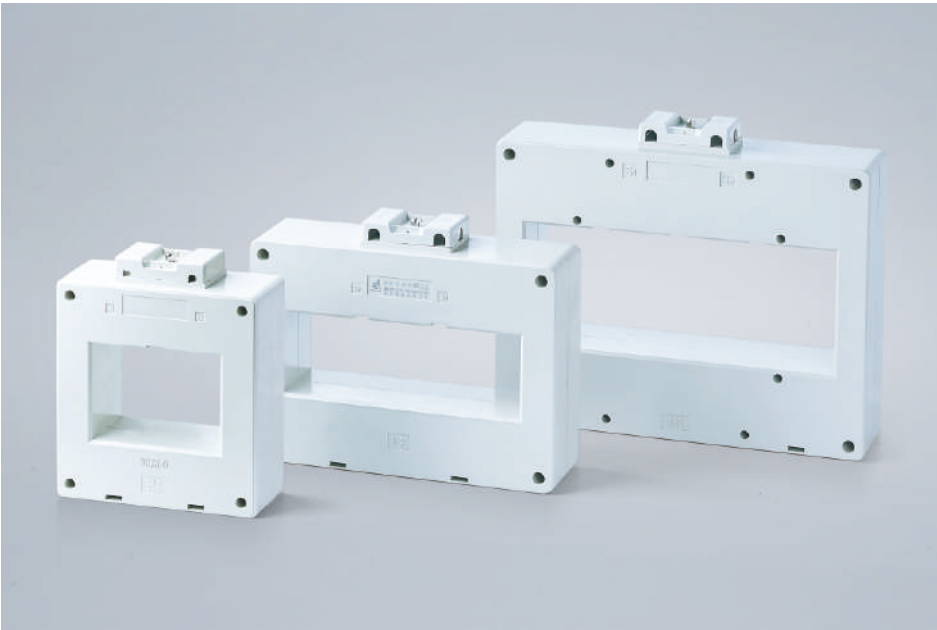Series Current Transformer



Code and implication

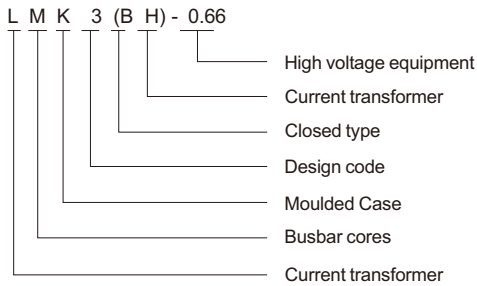

Application


LMK3(BH)-0.66 type current transformer is mainly used for indoor, for rated voltage up to and including 0.66 kV, rated frequency 50Hz ac circuit as the electric current and electric energy measurement and relay protection. Product is a plastic shell type current transformer, are widely used in the complete sets of cabinet put oneself in another's position, its installation method can be used bus fixed and base plate fixed installation method.







Standard: IEC 61869

Working environment

1. Installation sites: Indoor
2. Ambient temperature : -5~40℃
3. Ambient humidity: ≤ 80%
4. Altitude: ≤1000m
5. Atmospheric conditions: no serious impurity in the atmosphere.

Technical parameters and installation size









Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	200/5	2.5				1	
	250/5	2.5				1	
	300/5	5				1	
	400/5	5				1	
LMK3(BH)-0.66 30							






Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
LMK3(BH)-0.66 50							
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
LMK3(BH)-0.66 60							
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
LMK3(BH)-0.66 80							
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
LMK3(BH)-0.66 100							
	1000/5	5	5	5	5	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
LMK3(BH)-0.66 130							

LMK3(BH)-0.66

Series Current Transformer



Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
	6000/5	40	40	40	40	1	
	7000/5	40	40	40	40	1	
	8000/5	40	40	40	40	1	
LMK3(BH)-0.66 150							
	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
	6000/5	40	40	40	40	1	
	7000/5	45	45	45	45	1	
	8000/5	40	40	40	40	1	
LMK3(BH)-0.66 180							
	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
	6000/5	40	40	40	40	1	
	7000/5	40	40	40	40	1	
	8000/5	40	40	40	40	1	
LMK3(BH)-0.66 200							
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
	6000/5	40	40	40	40	1	
	7000/5	40	40	40	40	1	
	8000/5	40	40	40	40	1	
LMK3(BH)-0.66 220							
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
	6000/5	40	40	40	40	1	
	7000/5	40	40	40	40	1	
	8000/5	40	40	40	40	1	
LMK3(BH)-0.66 260							

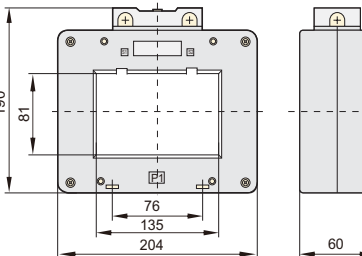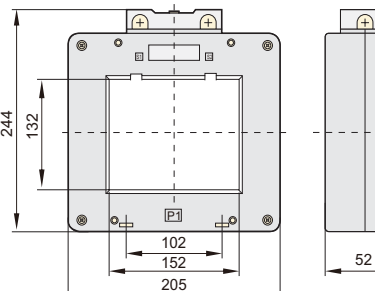Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
LMK3(BH)-0.66 100x80							
	1000/5	5	5	5	5	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
LMK3(BH)-0.66 130x80							
	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
	6000/5	40	40	40	40	1	
	7000/5	40	40	40	40	1	
	8000/5	40	40	40	40	1	
LMK3(BH)-0.66 150x130							

Ordering instructions

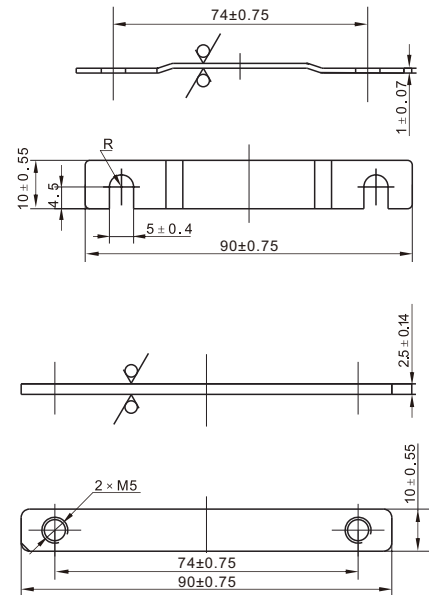
When the customer ordering, must provide the following information:

- 1, The product model and window width;
- 2, Rated current ratio;
- 3, Rated output, and the corresponding accurate level;

For example: order LMK3 (BH) - 0.66 type, window width is 80 mm, rated current than 1500/5 a and rated output 10 VA, accurate magnitude 0.5 on the Richter scale transformer.

Order, code-named LMK3 (BH) 0.66 Φ 80 1500/5 1 turn 10 VA a 0.5 on the Richter scale are unlikely. 4, if you have special requirements, can be customized consultation with the manufacturer.

Installation accessories




LMK4(BH)-0.66

Series Current Transformer



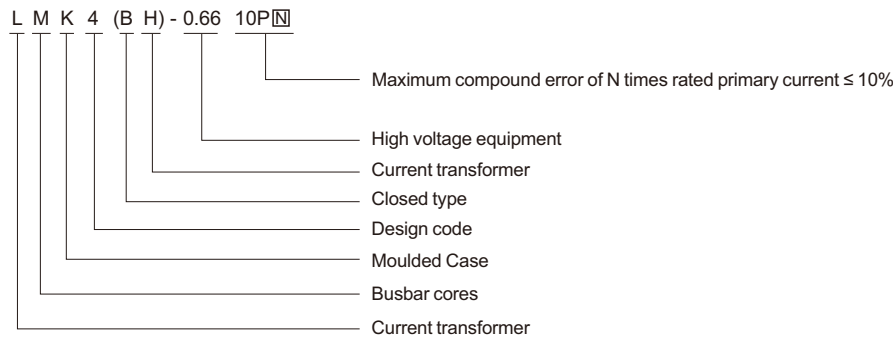Code and implication



Application

LMK4(BH)-0.66 type current transformer is mainly used for indoor, for rated voltage up to and including 0.66 kV, rated frequency 50Hz ac circuit as the electric current and electric energy measurement and relay protection. Product is a plastic shell type current transformer, are widely used in the complete sets of cabinet put oneself in another's position, its installation method can be used bus fixed and base plate fixed installation method.

Standard: IEC 61869

Working environment

- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.

Technical parameters and installation size

Product chart	Current ratio (A)	Secondary load(VA)			Cross-core turn number	Appearance and installation dimensions
		10P5	10P10	10P15		
 LMK4(BH)-0.66 50	200/5	5			1	
	300/5	5	2.5		1	
	400/5	10	5	2.5	1	
	500/5	10	5	2.5	1	
	600/5	15	10	5	1	
	750/5	15	10	5	1	
	800/5	15	10	5	1	
 LMK4(BH)-0.66 60	400/5	10	5	2.5	1	
	500/5	10	5	2.5	1	
	600/5	10	5	2.5	1	
	750/5	10	5	2.5	1	
	800/5	10	5	2.5	1	
	1000/5	10	10	5	1	
	1200/5	10	10	5	1	

Product chart	Current ratio (A)	Secondary load(VA)			Cross-core turn number	Appearance and installation dimensions
		10P5	10P10	10P15		
 LMK4(BH)-0.66 80	600/5	10	5	2.5	1	
	750/5	10	5	2.5	1	
	800/5	10	5	2.5	1	
	1000/5	10	10	5	1	
	1200/5	10	10	5	1	
	1500/5	10	10	5	1	
	2000/5	10	10	5	1	
 LMK4(BH)-0.66 100	800/5	10	5	2.5	1	
	1000/5	10	10	5	1	
	1200/5	10	10	5	1	
	1500/5	10	10	5	1	
	2000/5	10	10	5	1	
	2500/5	10	10	5	1	
 LMK4(BH)-0.66 130	1000/5	10	10	5	1	
	1200/5	10	10	5	1	
	1500/5	10	10	5	1	
	2000/5	10	10	5	1	
	2500/5	10	10	5	1	
	3000/5	10	10	5	1	
	4000/5	10	10	5	1	

Ordering instructions

When the customer ordering, must provide the following information:

- 1, The product model and window width;
- 2, Rated current ratio;
- 3, Rated output, and the corresponding accurate level;

For example: order LMK4 (BH) - 0.66 type, window height is 50 mm, rated current than 500/5 A and rated output 5 VA, accurate magnitude 10P10 on the Richter scale transformer.

Order, code-named LMK4 (BH) 0.66 Φ 50 500/5A 5VA a 10P10 on the Richter scale are unlikely.


4, if you have special requirements, can be customized consultation with the manufacturer.

LMK5-0.66

Series Current Transformer



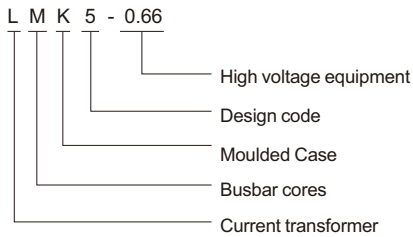Code and implication





Application







LMK5-0.66 type current transformer is mainly used for indoor, for rated voltage up to and including 0.66 kV, rated frequency 50Hz ac circuit as the electric current and electric energy measurement and relay protection. Product is a plastic shell type current transformer, are widely used in the complete sets of cabinet put oneself in another's position, its installation method can be used bus fixed and base plate fixed installation method.
Standard: IEC 61869

Working environment

- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.

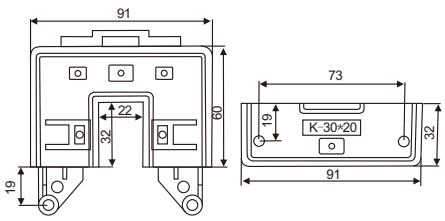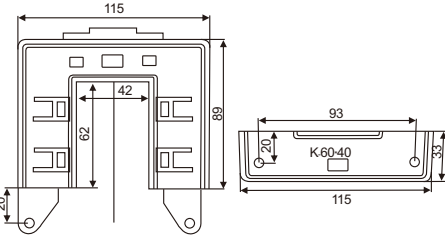Technical parameters and installation size

Product chart	Current ratio (A)	Secondary load(VA)	Cross-core turn number	Appearance and installation dimensions
		Class 0.5 / Class 1		
 30*20	100/5	1.0	1	
	150/5	1.0	1	
	200/5	1.0	1	
	300/5	1.0	1	
	400/5	2.5	1	
 60*40	400/5	1.0	1	
	500/5	1.0	1	
	600/5	2.5	1	
	800/5	2.5	1	
	1000/5	5.0	1	

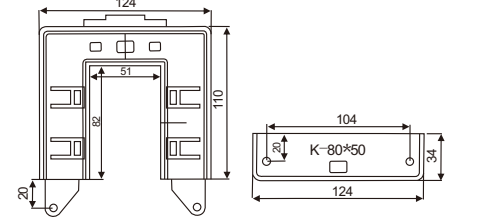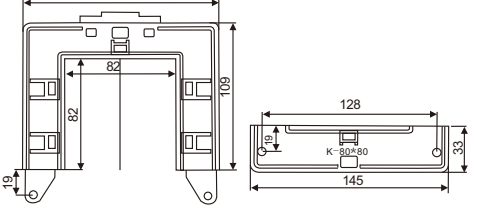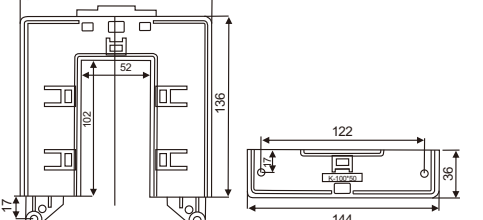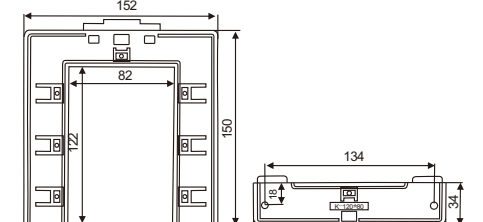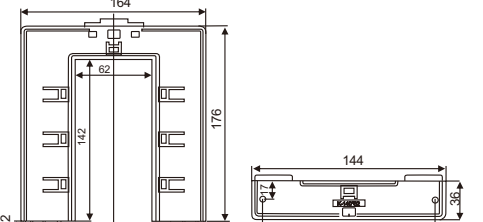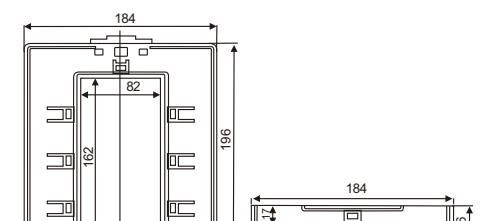
Product chart	Current ratio (A)	Secondary load(VA)	Cross-core turn number	Appearance and installation dimensions
		Class 0.5 / Class 1		
 80*50	400/5	1.0	1	
	500/5	1.0	1	
	600/5	2.5	1	
	800/5	2.5	1	
	1000/5	5.0	1	
	1200/5	5.0	1	
 80*80	1500/5	5.0	1	
	400/5	1.0	1	
	500/5	1.0	1	
	600/5	2.5	1	
	800/5	2.5	1	
 100*50	1000/5	5.0	1	
	600/5	2.5	1	
	800/5	2.5	1	
	1000/5	5.0	1	
	1200/5	5.0	1	
	1500/5	5.0	1	
 100*80	2000/5	5.0	1	
	2500/5	5.0	1	
	800/5	2.5	1	
	1000/5	5.0	1	
	1200/5	5.0	1	
	1500/5	5.0	1	
 120*80	2000/5	5.0	1	
	2500/5	10.0	1	
	3000/5	10.0	1	
	800/5	2.5	1	
	1000/5	5.0	1	
	1200/5	5.0	1	
 140*60	1500/5	5.0	1	
	2000/5	5.0	1	
	2500/5	10.0	1	
	3000/5	10.0	1	
	4000/5	10.0	1	
	1000/5	5.0	1	
 160*80	1200/5	5.0	1	
	1500/5	5.0	1	
	2000/5	5.0	1	
	2500/5	10.0	1	
	3000/5	10.0	1	
	4000/5	10.0	1	
	5000/5	20.0	1	
	6000/5	20.0	1	

LMK6(BH)-0.66


Series Current Transformer



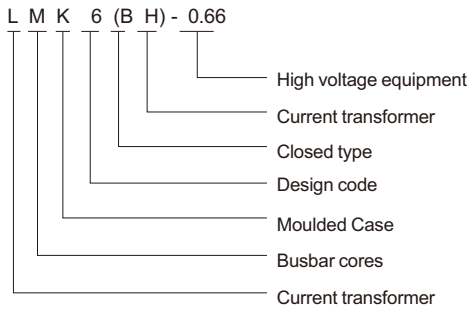Code and implication



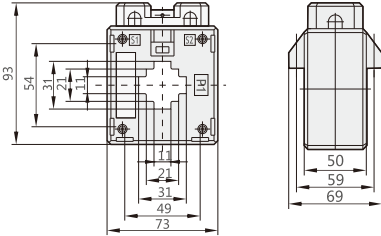Technical parameters and installation size









Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	150/5	5	5	5		1	
	200/5	5	5	5	5	1	
	250/5	5	5	5	5	1	
	300/5	5	5	5	5	1	
	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
LMK6(BH)-0.66 30							

Application

LMK6 (BH) -0.66 current transformer main use Inductance, rated voltage 0.66kV or less, rated voltage 50Hz in AC circuit for current, electric energy measurement or surveying. Product type plastic jar type electric current sympathizer, application in-use inductance body, its mounting method, mother exhaust fixing Japanese bottom plate fixing mounting method, suitable horizontal or vertical mounting, given type I, II phase ratio tool large capacity, high accuracy, attached Advantages such as small and cheap flights. Standard: IEC 61869.

Working environment

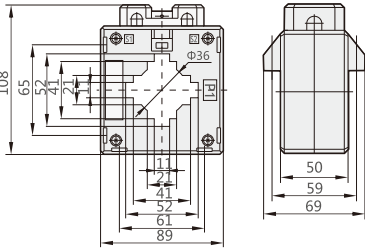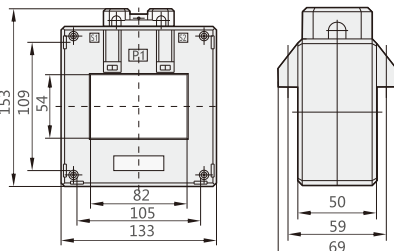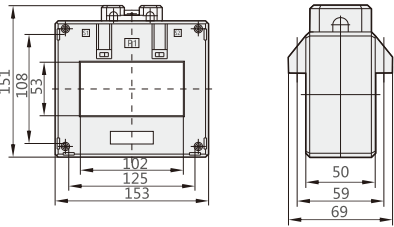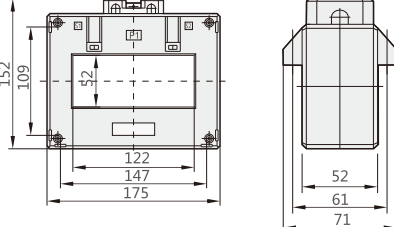- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.


Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 1	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	150/5		5				1	
	200/5		5				1	
	250/5		5				1	
	300/5		5	5	5	5	1	
	400/5		5	5	5	5	1	
	500/5		5	5	5	5	1	
	600/5		5	5	5	5	1	
	750/5		10	10	10	5	1	
	800/5		10	10	10	5	1	
	1000/5		10	10	10	5	1	
LMK6(BH)-0.66 40								
	300/5		5				1	
	400/5		5				1	
	500/5		5	5	5	5	1	
	600/5		5	5	5	5	1	
	750/5		10	10	10	5	1	
	800/5		10	10	10	5	1	
	1000/5		10	10	10	5	1	
	1200/5		20	20	20	5	1	
LMK6(BH)-0.66 50								
	500/5		5	5	5		1	
	600/5		5	5	5		1	
	750/5		10	10	10		1	
	800/5		10	10	10		1	
	1000/5		10	10	10		1	
	1200/5		20	20	20	5	1	
	1500/5		20	20	20	10	1	
	2000/5		30	30	30	10	1	
LMK6(BH)-0.66 60								
	500/5	5	5	5	5		1	
	600/5	5	5	5	5		1	
	750/5	10	10	10	10	5	1	
	800/5	10	10	10	10	5	1	
	1000/5	10	10	10	10	5	1	
	1200/5	20	20	20	20	5	1	
	1500/5	20	20	20	20	10	1	
	2000/5	30	30	30	30	10	1	
	2500/5	30	30	30	30	10	1	
LMK6(BH)-0.66 80								
	800/5	10	10	10	10		1	
	1000/5	10	10	10	10	5	1	
	1200/5	20	20	20	20	5	1	
	1500/5	20	20	20	20	10	1	
	2000/5	30	30	30	30	10	1	
	2500/5	30	30	30	30	10	1	
	3000/5	30	30	30	30	10	1	
LMK6(BH)-0.66 100								
	1000/5	10	10	10	10		1	
	1200/5	20	20	20	20	5	1	
	1500/5	20	20	20	20	10	1	
	2000/5	30	30	30	30	10	1	
	2500/5	30	30	30	30	10	1	
	3000/5	30	30	30	30	10	1	
	4000/5	30	30	30	30	10	1	
LMK6(BH)-0.66 120								

LMK7

Series Three Phase Current Transformer



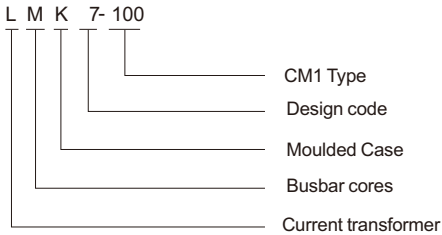Code and implication



Features



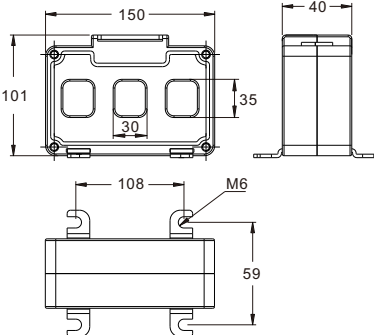
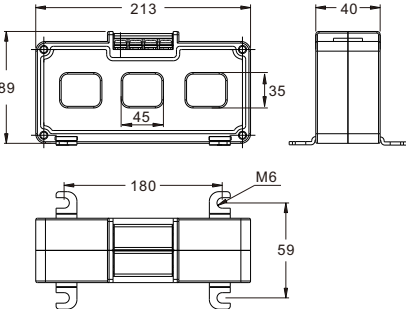
- 1. Copper wires and cables can pass through,
- 2. Core piercing structure, flame retardant epoxy resin casting, good stability
- 3. Using high magnetic conductivity nickel steel or nanocrystalline, good linearity and high sensitivity
- 4. Excellent balance characteristics and strong anti electromagnetic interference

Overview

Three phase current transformer, specially designed for collecting current signal. The design is strictly in accordance with the standard CM1 molded case circuit breaker threading size. This series of products have wide measurement range, rated primary current range: 0 ~ 1000A, rated secondary current range: 20mA ~ 5a, excellent and advanced production process. Standard: IEC 61869

Application

Electrical fire monitoring, current and voltage sensor equipment, fire equipment power module, fire leakage system, small current grounding system, electromagnetic relay protection, microcomputer protection, etc.


Product chart	Rated input (A)	Secondary load(mA)	Accuracy classes	Appearance and installation dimensions
 LMK7-100	0~100A	0~5A	0.5 1.0	
 LMK7-250	0~250A	0~5A	0.5 1.0	
 LMK7-400	0~400A	0~5A	0.5 1.0	
 LMK7-800	0~800A	0~5A	0.5 1.0	

LMK8(BH)-0.66

Series Current Transformer



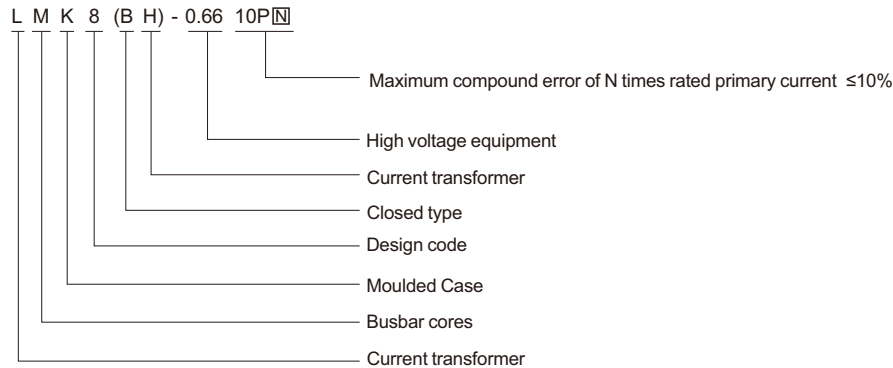Code and implication




Application






LMK8 (BH) -0.66 current transformer main use Inductance, rated voltage 0.66kV or less, rated voltage 50Hz in AC circuit for current, electric energy measurement or surveying. Product type plastic jar type electric current sympathizer, application in-use inductance body, its mounting method, mother exhaust fixing Japanese bottom plate fixing mounting method, suitable horizontal or vertical mounting, given type I, II phase ratio tool large capacity, high accuracy, attached Advantages such as small and cheap flights. Standard: IEC 61869

Working environment

- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.





Technical parameters and installation size

Product chart	Current ratio (A)	Secondary load(VA)	Cross-core turn number	Appearance and installation dimensions
		5P5		
	150/5	2.5	1	
	200/5	2.5	1	
	250/5	2.5	1	
	300/5	2.5	1	
	400/5	2.5	1	
	500/5	2.5	1	
LMK8(BH)-0.66 30				

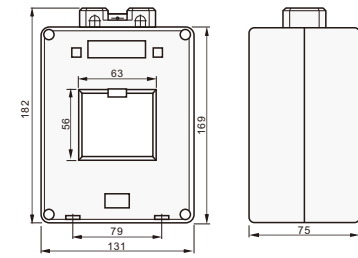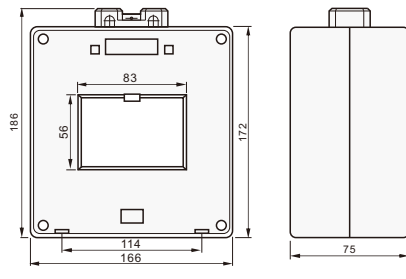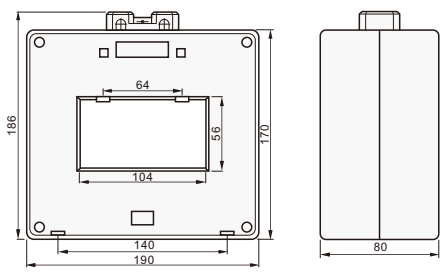Product chart	Current ratio (A)	Secondary load(VA)	Cross-core turn number	Appearance and installation dimensions
		5P5		
	150/5	1	1	
	200/5	1	1	
	250/5	1	1	
	300/5	1	1	
	400/5	1	1	
	500/5	2.5	1	
	600/5	2.5	1	
LMK8(BH)-0.66 40				
	300/5	1	1	
	400/5	1	1	
	500/5	2.5	1	
	600/5	2.5	1	
	750/5	2.5	1	
	800/5	2.5	1	
	1000/5	2.5	1	
LMK8(BH)-0.66 50				
	500/5	2.5	1	
	600/5	2.5	1	
	750/5	2.5	1	
	800/5	2.5	1	
	1000/5	2.5	1	
	1200/5	2.5	1	
	1500/5	2.5	1	
LMK8(BH)-0.66 60				
	500/5	5	1	
	600/5	5	1	
	750/5	5	1	
	800/5	5	1	
	1000/5	5	1	
	1200/5	5	1	
	1500/5	5	1	
	2000/5	5	1	
	2500/5	5	1	
LMK8(BH)-0.66 80				
	800/5	5	1	
	1000/5	5	1	
	1200/5	5	1	
	1500/5	5	1	
	2000/5	10	1	
	2500/5	10	1	
	3000/5	10	1	
LMK8(BH)-0.66 100				

LMK8(BH)-0.66

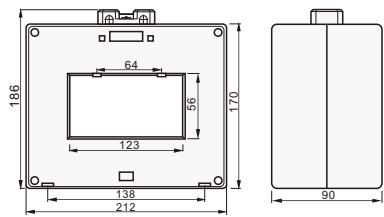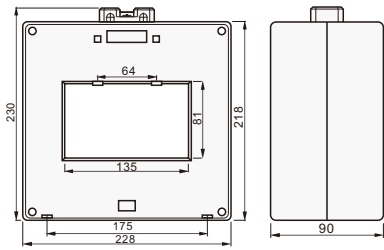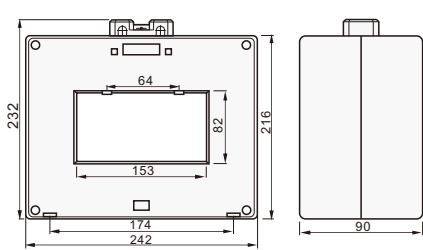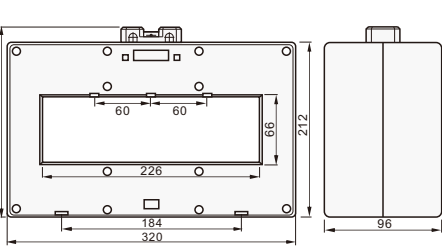Series Current Transformer

Product chart	Current ratio (A)	Secondary load(VA)	Cross-core turn number	Appearance and installation dimensions
		10P10		
 LMK8(BH)-0.66 120	1000/5	5	1	
	1200/5	5	1	
	1500/5	5	1	
	2000/5	10	1	
	2500/5	10	1	
	3000/5	10	1	
 LMK8(BH)-0.66 130	4000/5	20	1	
	2000/5	10	1	
	3000/5	10	1	
	4000/5	20	1	
	5000/5	20	1	
 LMK8(BH)-0.66 150	6000/5	20	1	
	2000/5	10	1	
	3000/5	10	1	
	4000/5	20	1	
	5000/5	20	1	
	6000/5	20	1	
 LMK8(BH)-0.66 220	7000/5	20	1	
	8000/5	20	1	
	4000/5	20	1	
	5000/5	20	1	
	6000/5	20	1	

Ordering instructions

When the customer ordering, must provide the following information:

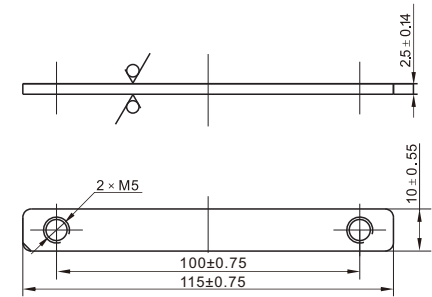
- 1, The product model and window width;
- 2, Rated current ratio;
- 3, Rated output, and the corresponding accurate level;

For example: order LMK8 (BH) - 0.66 type, window width is 80 mm, rated current than 2000/5 a and rated output 10 VA, accurate magnitude 10P10 on the Richter scale transformer.

Order, code-named LMK8 (BH) 0.66 Φ 80 2000/5 1 turn 10 VA a 10P10 on the Richter scale are unlikely.

4, if you have special requirements, can be customized consultation with the manufacturer.

Installation accessories



LMZJ1-0.66

Series Current Transformer



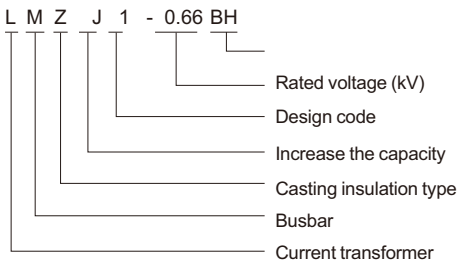
Application


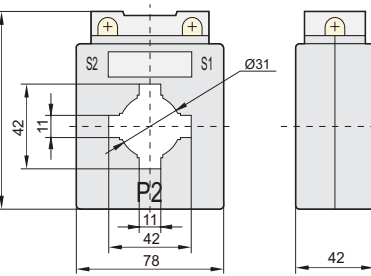
- LMZJ1-0.66 BH type current transformer is mainly used for indoor, for rated voltage up to and including 0.66 kV, rated frequency 50Hz ac circuit as the electric current and electric energy measurement and relay protection. The product is epoxy resin current transformer, are widely used in the complete sets of cabinet put oneself in another's position, its installation method can be used bus fixed and base plate fixed installation method, suitable for any direction
 - installation, a conductor for bus or cable.
- Standard: IEC 61869

Working environment

1. Installation sites: Indoor
2. Ambient temperature : -5~40℃
3. Ambient humidity: ≤ 80%
4. Altitude: ≤1000m
5. Atmospheric conditions: no serious impurity in the atmosphere.




Code and implication



Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 1	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 LMZJ1-0.66 30	100/5		2.5				1	
	150/5		2.5				1	
	200/5		2.5				1	
	300/5		5				1	
	400/5		5				1	
 LMZJ1-0.66 40	200/5		2.5				1	
	250/5		2.5				1	
	300/5		5				1	
	400/5		5				1	
	500/5		5				1	
	600/5		5				1	
	750/5		10				1	
	800/5		10				1	

LMZJ1-0.66

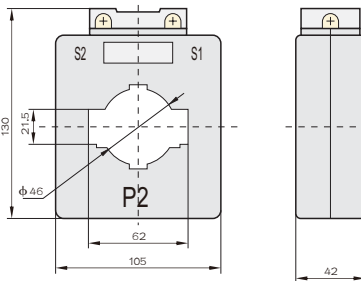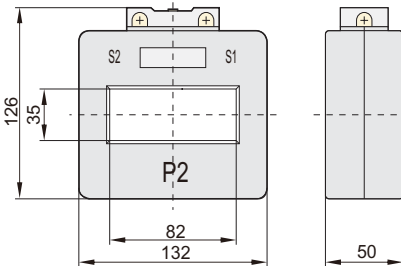Series Current Transformer

Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 1	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	300/5		2.5				1	
	400/5		5				1	
	500/5		5				1	
	600/5		5				1	
	750/5		10				1	
	800/5		10				1	
	1000/5		10				1	
LMZJ1-0.66 50								
	400/5		5				1	
	500/5		5				1	
	600/5		5				1	
	750/5		10				1	
	800/5		10				1	
	1000/5		10				1	
LMZJ1-0.66 60								
	500/5		5				1	
	600/5		5				1	
	750/5		10				1	
	800/5		10				1	
	1000/5		10				1	
	1200/5		10				1	
	1500/5		10				1	
	2000/5		10				1	
LMZJ1-0.66 80								

Ordering instructions

When the customer ordering, must provide the following information:

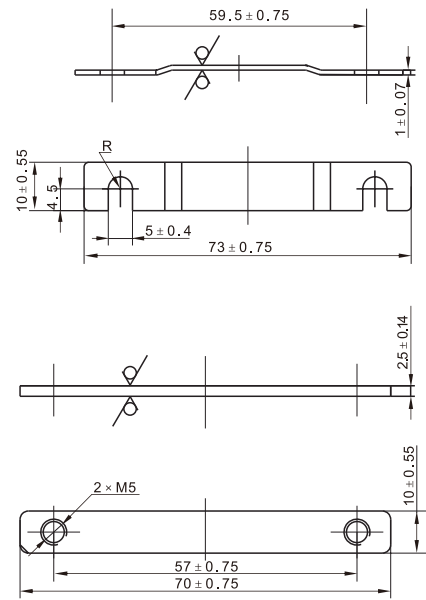
- 1, The product model and window width;
- 2, Rated current ratio;
- 3, Rated output, and the corresponding accurate level;

For example: order LMZJ1-0.66 type, window width is 30 mm, rated current than 200/5 a and rated output 5 VA, accurate magnitude 0.5 on the Richter scale transformer.

Order, code-named LMZJ1-0.66 Φ 30 200/5 1 turn 5 VA a 0.5 on the Richter scale are unlikely.

4, if you have special requirements, can be customized consultation with the manufacturer.

Installation accessories



LMZJ1-0.5

Series Current Transformer

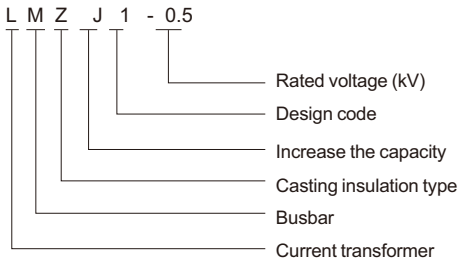


Application

LMZJ1 0.5 solid type current transformer is mainly used for indoor, for rated voltage up to and including 0.5kV, rated frequency 50Hz AC circuit as the electric current and electric energy measurement and relay protection, product adopts casting insulation, adopting bottom fixed installation.

Standard: IEC 61869


Code and implication



Working environment

- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.

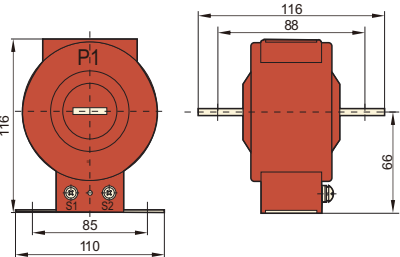Technical parameters and installation size

Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	5/5	5	5	5	5		
	10/5	5	5	5	5		
	15/5	5	5	5	5		
	20/5	5	5	5	5		
	30/5	5	5	5	5		
	50/5	5	5	5	5		
	75/5	5	5	5	5		
	100/5	5	5	5	5		
	150/5	5	5	5	5		
	200/5	5	5	5	5		
	300/5	5	5	5	5		
	400/5	5	5	5	5		
	500/5	5	5	5	5		
	600/5	5	5	5	5		

Ordering instructions

When the customer ordering, must provide the following information:

- 1, product model; Current ratio; Rated output level and accurate;

For example: solid order LMZJ1-0.5, rated output current ratio 150/5 a and 5 va, Accurate magnitude 0.5 magnitude of transformer.

The order code for LMZJ1-0.5 solid 150/5 5 va a magnitude of 0.5.


- 2, if you have special requirements, can be customized consultation with the manufacturer.

LMZJ1-0.5

Series Current Transformer



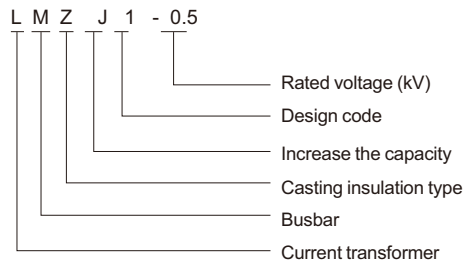Code and implication



Technical parameters and installation size








Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	5/5	5	5	5	5	30	
	10/5	5	5	5	5	15	
	15/5	5	5	5	5	10	
	20/5	5	5	5	5	10	
	25/5	5	5	5	5	6	
	30/5	5	5	5	5	5	
	40/5	5	5	5	5	5	
	50/5	5	5	5	5	3	
	75/5	5	5	5	5	2	
	75/5	5	5	5	5	1	
	100/5	5	5	5	5	2	
	100/5	5	5	5	5	1	
	150/5	5	5	5	5	1	
	200/5	5	5	5	5	1	
	250/5	5	5	5	5	1	
	300/5	5	5	5	5	1	

Application

LMZJ1-0.5 type current transformer is mainly used for indoor, for rated voltage up to and including 0.5kV, rated frequency 50Hz AC circuit as the electric current and electric energy measurement and relay protection, product adopts casting insulation, adopting bottom fixed installation.
Standard: IEC 61869

Working environment

- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.


Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	200/5	5	5	5	5	1	
	300/5	5	5	5	5	1	
	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	700/5	10	10	10	10	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	*1000/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	*2000/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
	6000/5	40	40	40	40	1	

LMZ(J)1-0.66

Series Current Transformer



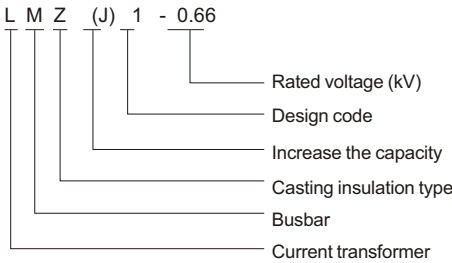Code and implication



Application




LMZ(J)1-0.66 type current transformer is mainly used for indoor, for rated voltage up to and including 0.66kV, rated frequency 50Hz AC circuit as the electric current and electric energy measurement and relay protection, product adopts casting insulation, adopting bottom fixed installation.









Standard: IEC 61869

Working environment

- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.

Technical parameters and installation size

Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 30	100/5	2.5	2.5	2.5	2.5	1	
	150/5	5	5	5	5	1	
	200/5	5	5	5	5	1	
	250/5	5	5	5	5	1	
	300/5	5	5	5	5	1	
 40	200/5	5	5	5	5	1	
	300/5	5	5	5	5	1	
	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
 50	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	

Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 60	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
 80	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
 100	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
 125	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
 140	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	40	40	40	40	1	
	6000/5	40	40	40	40	1	
 30	100/5	5	5	5	5	1	
	150/5	5	5	5	5	1	
	200/5	5	5	5	5	1	
	250/5	5	5	5	5	1	
	300/5	5	5	5	5	1	
 80	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
 100	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	

Ordering instructions

When the customer ordering, must provide the following information:

1,product model and Install the bus width;

2, current ratio;

3, rated output, and the corresponding accurate level;

For example: solid order LMZJ1-0.5, rated output current ratio 600/5 A and 5 VA Accurate magnitude 0.5 magnitude of transformer. The order code for LMZJ1-0.5 600/5 5 va a magnitude of 0.5.

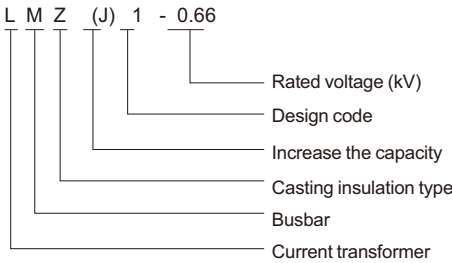
4, if you have special requirements, can be customized consultation with the m anufacturer.

LMZ(J)1-0.66 Q

Series Current Transformer



Code and implication






Application







LMZ(J)1-0.66 Q type current transformer is mainly used for indoor, for rated voltage up to and including 0.66kV, rated frequency 50Hz AC circuit as the electric current and electric energy measurement and relay protection, product adopts casting insulation, adopting bottom fixed installation.
Standard: IEC 61869

Working environment

1. Installation sites: Indoor
2. Ambient temperature : -5~40℃
3. Ambient humidity: ≤ 80%
4. Altitude: ≤1000m
5. Atmospheric conditions: no serious impurity in the atmosphere.

Technical parameters and installation size

Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 30 Q Class 0.5	75/5		2.5	2.5	2.5	1	
	100/5	2.5	2.5	2.5	2.5	1	
	150/5	5	5	5	5	1	
	200/5	5	5	5	5	1	
	250/5	5	5	5	5	1	
	300/5	5	5	5	5	1	
 30 Q Class 0.5S, 0.2, 0.2S							
 40 Q	200/5	5	5	5	5	1	
	300/5	5	5	5	5	1	
	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	


Product chart	Current ratio (A)	Secondary load(VA)				Cross-core turn number	Appearance and installation dimensions
		Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
 50 Q	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	800/5	10	10	10	10	1	
 60 Q	500/5	5	5	5	5	1	
	600/5	5	5	5	5	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
 80 Q	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
 100 Q	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	10	10	10	10	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
	3000/5	20	20	20	20	1	
	1500/5	10	10	10	10	1	
	2000/5	10	10	10	10	1	
	2500/5	15	15	15	15	1	
 120 Q	3000/5	20	20	20	20	1	
	4000/5	30	30	30	30	1	
	5000/5	30	30	30	30	1	
	6000/5	30	30	30	30	1	
 180 Q	4000/5	30	30	30	30	1	
	5000/5	30	30	30	30	1	
	6000/5	30	30	30	30	1	
	7000/5	30	30	30	30	1	
	8000/5	30	30	30	30	1	

LMZ(J)1-0.66

Series Current Transformer



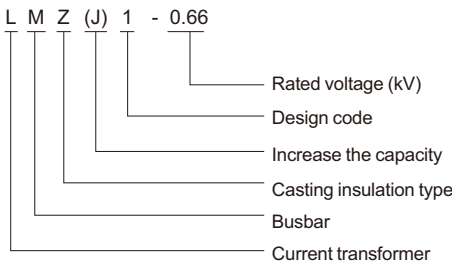Code and implication







Application




LMZ(J)1-0.66 Protective type current transformer is mainly used for indoor, for rated voltage up to and including 0.66kV, rated frequency 50Hz AC circuit as the electric current and electric energy measurement and relay protection, product adopts casting insulation, adopting bottom fixed installation. Standard: IEC 61869

Working environment

1. Installation sites: Indoor
2. Ambient temperature : -5~40℃
3. Ambient humidity: ≤ 80%
4. Altitude: ≤1000m
5. Atmospheric conditions: no serious impurity in the atmosphere.

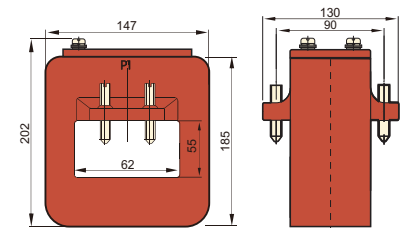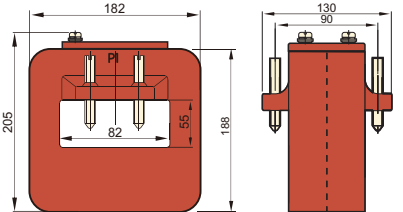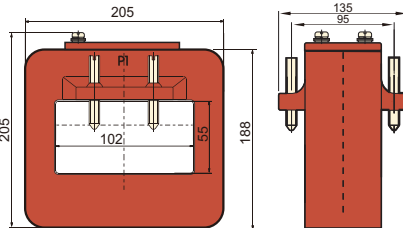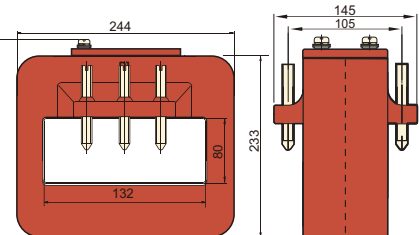Technical parameters and installation size

Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		Class 10P10	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	500/5	5	5	5	5	5	1	
	600/5	5	5	5	5	5	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	10	10	10	10	10	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	20	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	20	10	10	10	10	1	
	2500/5	20	15	15	15	15	1	
	3000/5	30	20	20	20	20	1	
	4000/5	30	30	30	30	30	1	
	5000/5	30	30	30	30	30	1	

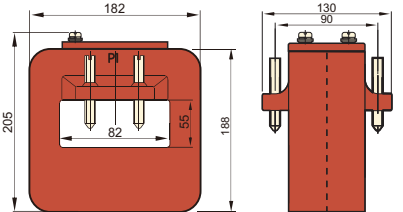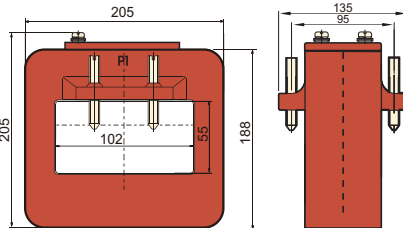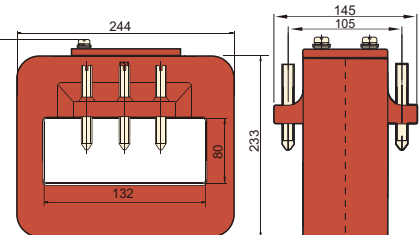
Product chart	Current ratio (A)	Secondary load(VA)					Cross-core turn number	Appearance and installation dimensions
		10P10	Class 0.5	Class 0.5S	Class 0.2	Class 0.2S		
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	10	10	10	10	10	1	
	750/5	10	10	10	10	10	1	
	800/5	10	10	10	10	10	1	
	1000/5	10	10	10	10	10	1	
	1200/5	10	10	10	10	10	1	
	1500/5	10	10	10	10	10	1	
	2000/5	20	10	10	10	10	1	
	2500/5	20	15	15	15	15	1	
	3000/5	20	20	20	20	20	1	
	4000/5	30	20	20	20	20	1	
	5000/5	30	30	30	30	30	1	
	6000/5	30	30	30	30	30	1	

LMZ-0.66

Southern Power Grid Series Current Transformer



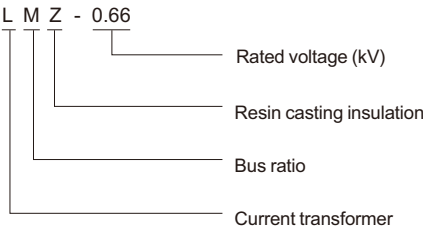Code and implication






Application


LMZ-0.66 Type current transformer is mainly used for indoor, for rated voltage up to and including 0.66kV, rated frequency 50Hz AC circuit as the Current measurement or electrical energy measurement, The product is an unsaturated resin casting method, and the fixed installation method is adopted.
Standard: IEC 61869

Working environment

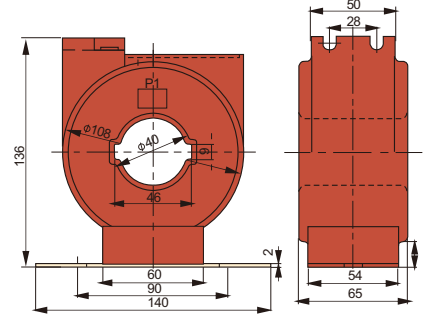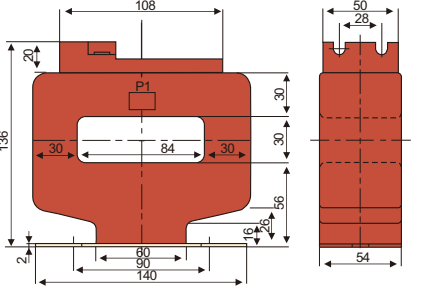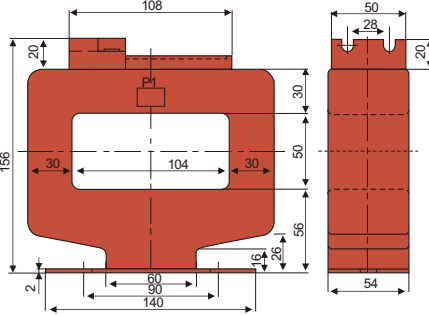- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.

Product chart	Current ratio (A)	Secondary load(VA)	Cross-core turn number	Appearance and installation dimensions
		Class 0.2S		
 LMZ-0.66	150/5	10	1	
	200/5	10	1	
	300/5	10	1	
 LMZ-0.66	400/5	10	1	
	500/5	10	1	
	600/5	10	1	
	750/5	10	1	
	800/5	10	1	
 LMZ-0.66	1000/5	10	1	
	1200/5	10	1	
	1500/5	10	1	
	2000/5	10	1	

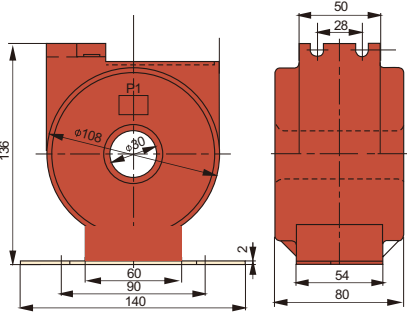Technical parameters and installation size


Product chart	Current ratio (A)	Secondary load(VA)	Cross-core turn number	Appearance and installation dimensions
		Class 0.2S		
 LMZ-0.66	75/5	10	1	
	100/5	10	1	

Ordering instructions


When the customer ordering, must provide the following information:
1,product model and Install the bus width;
2, current ratio;
3, rated output, and the corresponding accurate level;
For example: solid order LMZ-0.66, Bus width is 30mm, rated output current ratio 150/5 A and 10 VA, Accurate magnitude 0.2S magnitude of transformer.
The order code for LMZ-0.66 150/5A 10 VA a magnitude of 0.2S.
4, if you have special requirements, can be customized consultation with the manufacturer.

LFZ1D-0.66/LMZD-0.66

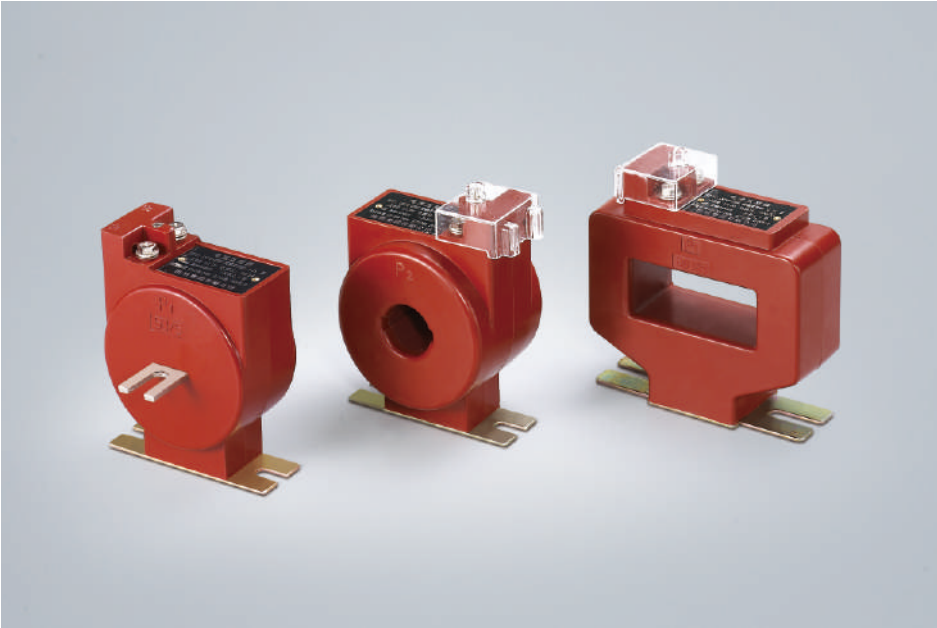State Grid Series Current Transformer



Code and implication

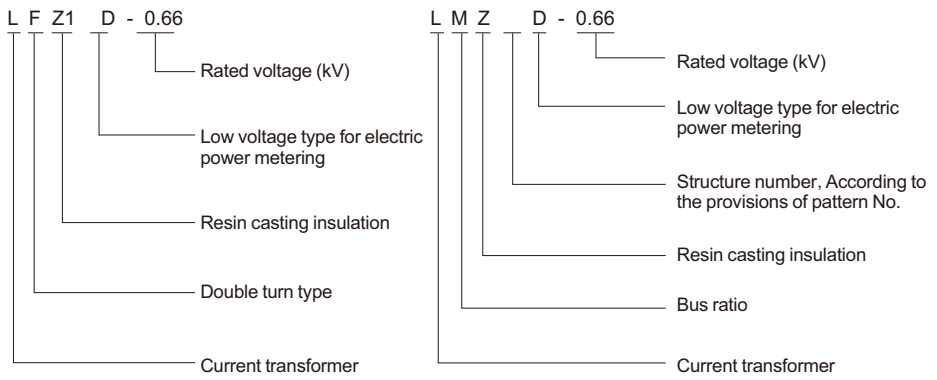


Application





LFZ1D-0.66 or LMZD-0.66 Type current transformer is mainly used for indoor, for rated voltage up to and including 0.66kV, rated frequency 50Hz AC circuit as the Current measurement or electrical energy measurement, The product is an unsaturated resin casting method, and the fixed installation method is adopted.
Standard: IEC 61869

Working environment

- 1. Installation sites: Indoor
- 2. Ambient temperature : -5~40℃
- 3. Ambient humidity: ≤ 80%
- 4. Altitude: ≤1000m
- 5. Atmospheric conditions: no serious impurity in the atmosphere.

Technical parameters and installation size

Product chart	Current ratio (A)	Secondary load(VA)		Cross-core turn number	Appearance and installation dimensions
		Class 0.5S	Class 0.2S		
 LFZ1D-0.66	5/5	5	5		
	10/5	5	5		
	15/5	5	5		
	20/5	5	5		
	25/5	5	5		
	30/5	5	5		
	40/5	5	5		
	50/5	5	5		

Product chart	Current ratio (A)	Secondary load(VA)		Cross-core turn number	Appearance and installation dimensions
		Class 0.5S	Class 0.2S		
 LMZ1D-0.66	75/5	5	5	1	
	100/5	5	5	1	
	150/5	5	5	1	
 LMZ2D-0.66	200/5	5	5	1	
	250/5	5	5	1	
	300/5	5	5	1	
	400/5	5	5	1	
	500/5	5	5	1	
 LMZ3D-0.66	600/5	10	10	1	
	750/5	10	10	1	
	800/5	10	10	1	
 LMZ4D-0.66	1000/5	10	10	1	
	1200/5	10	10	1	
	1500/5	10	10	1	
	2000/5	10	10	1	

Ordering instructions

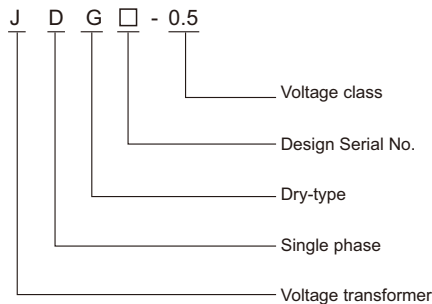
When the customer ordering, must provide the following information:
1,product model and Install the bus width;
2, current ratio;
3, rated output, and the corresponding accurate level;
For example: solid order LMZ1D-0.66, Bus width is 30mm, rated output current ratio 150/5 A and 5 VA, Accurate magnitude 0.5S magnitude of transformer.
The order code for LMZ1D-0.66 150/5A 5 VA a magnitude of 0.5S.
4, if you have special requirements, can be customized consultation with the manufacturer.

JDG-0.5,JDG4-0.5

Single-phase dry voltage transformers




Code and implication



Technical parameters

Type	Rated voltage ratio	Accuracy class and rated output		Power frequency withstand voltage
		0.2	0.5	
JDG4-0.5	220/100	10	15	3
	380/100	10	15	3
	660/100	10	15	3
	690/100	10	15	3
	380/√3/100/√3	5	5	3
	660/√3/100/√3	5	5	3
JDG-0.5	690/√3/100/√3	5	5	3
	220/100	15	20	3
	380/100	15	20	3
	660/100	15	20	3
	690/100	15	20	3
	380/√3/100/√3	5	10	3
	660/√3/100/√3	5	10	3
	690/√3/100/√3	5	10	3

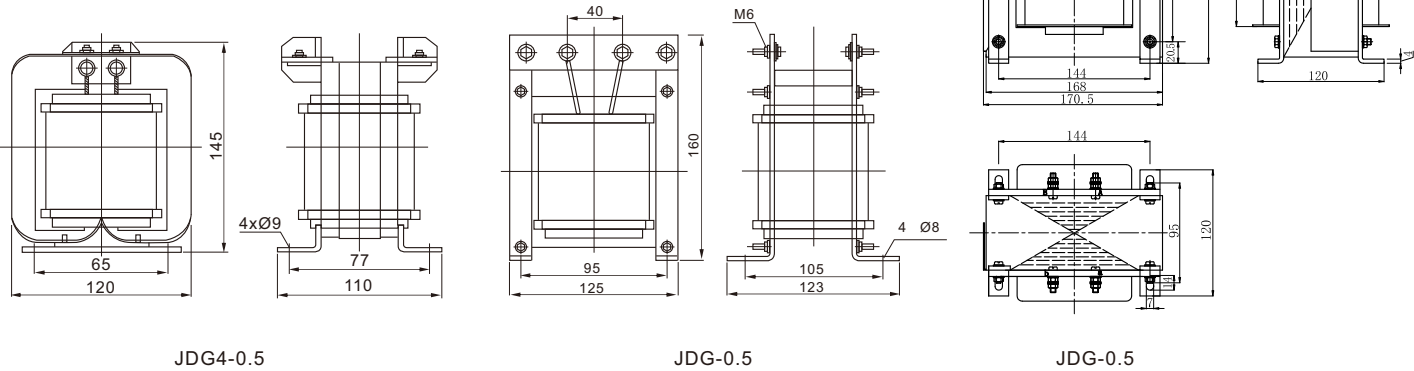Outline dimensions




JDZ-1

Single-phase dry voltage transformers



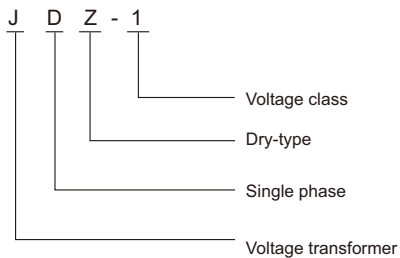
Code and implication




Technical parameters

Type	Rated voltage ratio	Accuracy class and rated output		Power frequency withstand voltage
		0.2	0.5	
JDZ-1	380/100	5	5	3
	660/100	5	5	3
	690/100	5	5	3
	1140/100	5	5	3

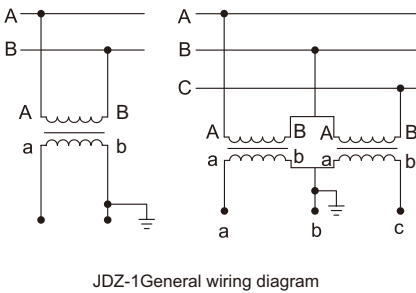Wiring Diagram




Outline dimensions

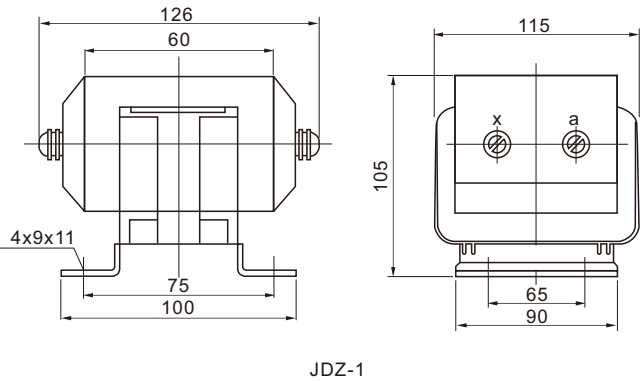

LXK-□

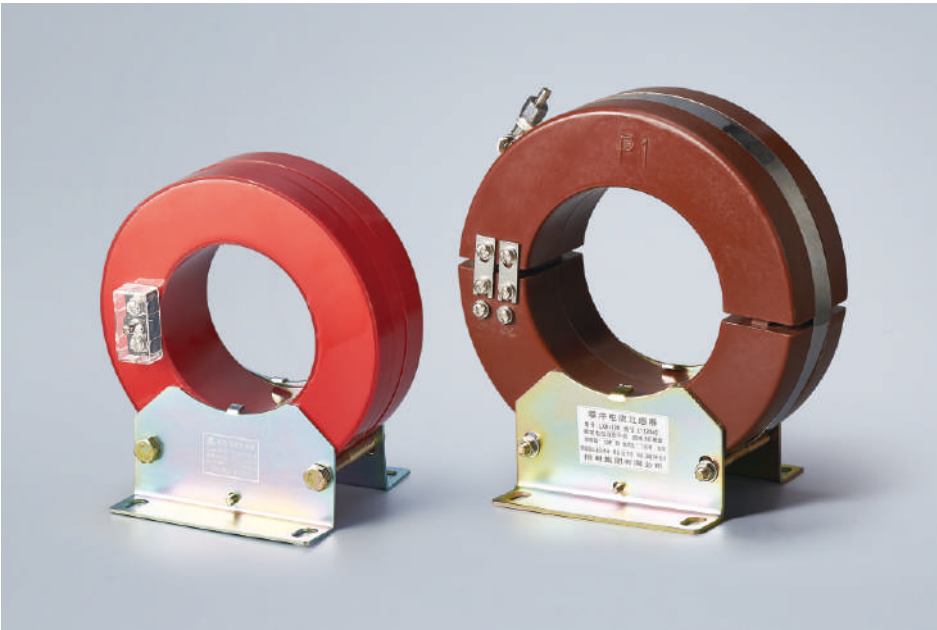Zero sequence current transformer



Technical parameters


Connection terminals and relay symbol	Relay coil connections	Scale of relay	Primary zero-sequence current
DD11/60	Series connection	15x1	2.5-4.5
		30x1	
	Parallel connection	15x2	3-5
		30x2	
DL11/0.2	Series connection	15x1	3-5
		30x1	
	Parallel connection	15x2	3-6
		30x2	

Outline dimensions




Type	ØD	Ød	H	a	b	m	n	c
LXK-80	165	80	185	130	110	120	90	57
LXK-100	180	100	200	130	110	120	90	57
LXK-120	204	120	224	130	110	120	90	57
LXK-150	235	150	270	190	150	145	125	57
LXK-180	310	180	376	260	220	164	125	80
LXK-200	330	200	370	260	220	164	125	80
LXK-240	350	240	400	260	220	164	125	80

Type	A	B	C	D*E	F*G	H
LXK-80	85	170	63	132*122	110x100	195
LXK-100	105	190	65	132*125	110x100	208
LXK-120	125	212	65	132*127	110x100	230
LXK-120(50/5)	125	215	67	132*130	110x105	230
LXK-140	145	240	65	200*133	150x100	270
LXK-150	155	243	65	200*133	150x100	275
LXK-160	165	268	65	200*133	150x100	290
LXK-180	185	302	67	280*155	220x115	356
LXK-200	205	326	69	280*155	220x120	382
LXK-220	225	346	69	280*155	220x120	402
LXK-240	245	386	80	280*167	220x120	438
LXK-260	265	406	80	280*167	220x130	458
LXK-300	305	465	80	280*167	220x130	523

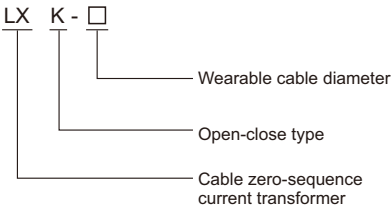Code and implication



Wiring Diagram

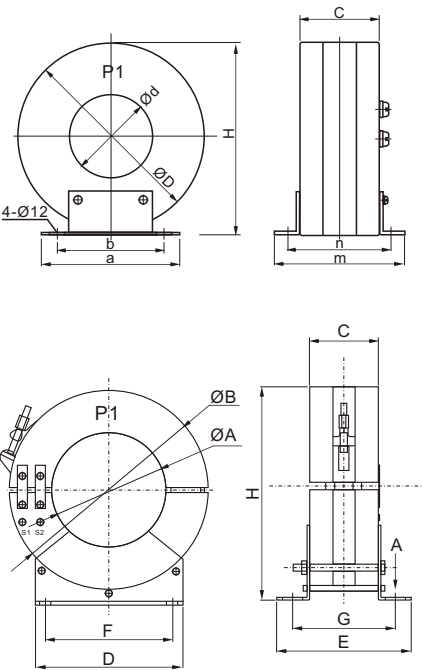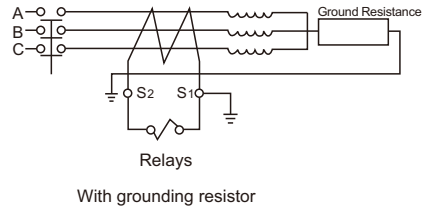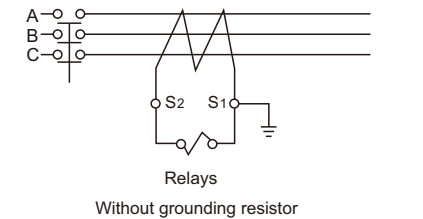

LMZC-10

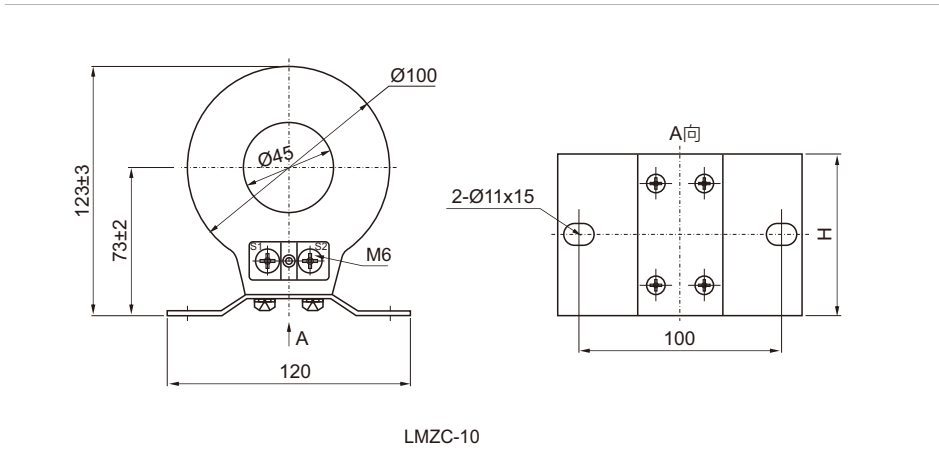
Current transformer



Performance

The current transformers are in accordance with GB/T20840.1, 2 and IEC61869-1, 2 standards
Rated secondary current 5A or 1A
Rated frequency 50Hz or 60Hz
Ambient temperature: -35°C~+55°C,
daily average temperature: ≤ 40°C
Power frequency withstand voltage: 3 kV, 1 min;
Altitude: ≤ 1000m


Outline dimensions



Application

LMZC-10 current transformer is suitable for installation in the ring net switch cabinets and switch on the main pillar of three-phase casing, and zero sequence current for three phase current transformer measurement and protection, can also be used for more cable circuit of zero sequence current measurement and protection.
The series of zero sequence current transformer core and secondary windings is made of high quality epoxy resin vacuum around the note in the fire retardant plastic casing, which has the characteristic of moisture proof, stable performance and dispensing with maintenance.

Code and implication



Features

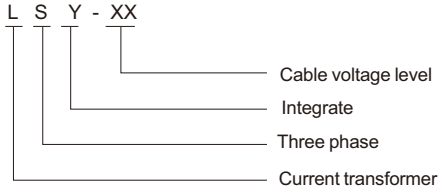
Transformer for ring network cabinet and gas-filled cabinet
6-35kV indoor current transformer
Indoor single-phase epoxy resin pouring type
Rated secondary current 5A or 1A

LSY-10/107

Three Phase Current Transformer




Code and implication



Technical parameters

Type	Purpose	Measuring current			Protection current transformer			Dual winding current transformer			
	Stable primary current	Accuracy class and rated load			Accuracy class and rated load			Accuracy class and rated load			
		0.2S	0.2	0.5	10P10	10P15	10P20	0.2S	0.5	10P15	10P10
LSY-10/107	75	-	-	1	-	-	-	-	1	-	-
	100	-	-	2.5	-	-	-	-	1	-	-
	150	-	-	2.5	2.5	-	-	-	1.5	-	-
	200	-	2.5	2.5	2.5	-	-	-	2.5	2.5	5
	300	2.5	2.5	5	2.5	-	-	-	2.5	5	5
	400	5	5	5	5	2.5	-	-	5	7.5	7.5
	500	5	5	10	5	2.5	-	-	5	10	10
	600	5	10	10	7.5	2.5	-	-	5	10	10
	800	10	10	10	7.5	2.5	-	-	5	15	10

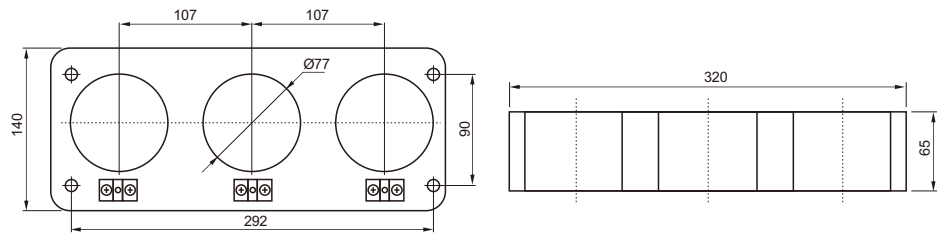Outline dimensions



Application

The LSY three-phase current transformer is suitable for installation in the ring net switch cabinets and switch on the main pillar of three-phase casing, and zero sequence current for three phase current transformer measurement and protection, can also be used for more cable circuit of zero sequence current measurement and protection. The series of zero sequence current transformer core and secondary windings is made of high quality epoxy resin vacuum around the note in the fire retardant plastic casing, which has the characteristic of moisture proof, stable performance and dispensing with maintenance.

Performance


- GB/T20840.1, 2
- IEC61869-1, 2
- 5A 1A
- 50Hz 60Hz
- -35 ~+55 , ≤40
- :3kV, 1min;
- : ≤1000
- The current transformers are in accordance with GB/T20840.1, 2 and IEC61869-1, 2 standards
- Rated secondary current 5A or 1A
- Rated frequency 50Hz or 60Hz
- Ambient temperature: -35°C~+55°C, daily average temperature: 40°C
- Power frequency withstand voltage: 3 kV, 1 min;
- Altitude: 1000m

LZZBJ9-10



Indoor, fully enclosed, all conditions, dry-type current transformer



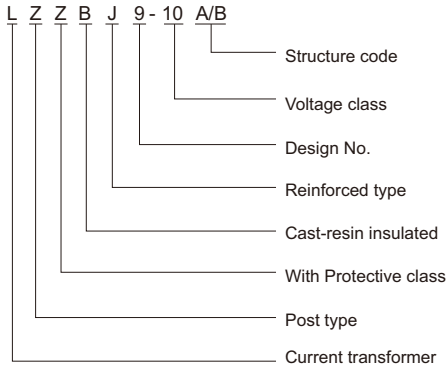Code and implication



Wiring Diagram

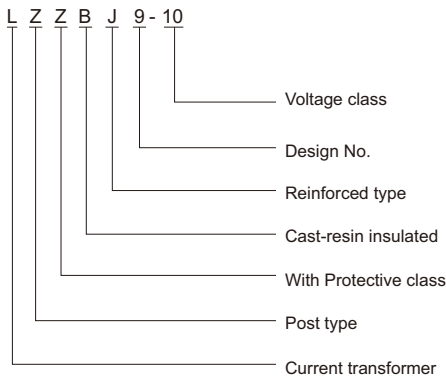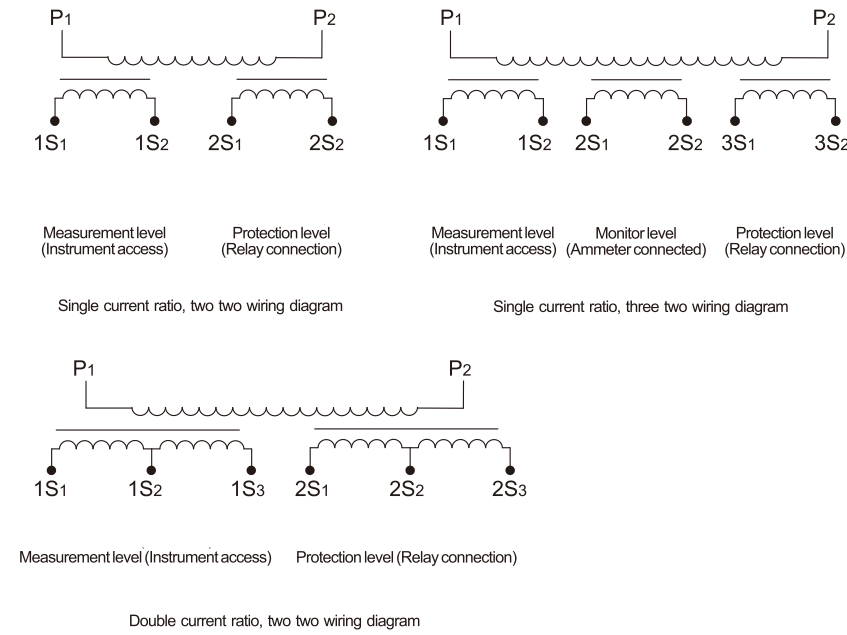

LZZBJ9-10

Indoor, fully enclosed, all conditions, dry-type current transformer




Technical parameters


Rated Primary current	Accuracy classes combination	Accuracy class and rated output							Short-time thermal current	Rated dynamic current
		0.2S	0.2	0.5S	0.5	10P10	10P15	10P20		
5	0.2S/10P10 0.2S/10P15 0.2S/10P20 0.2 /10P10 0.2 /10P15 0.2 /10P20 0.5 /10P10 0.5 /10P15 0.5 /10P20 0.2S/0.2/10P10 0.2S/0.2/10P20	10	10	10	10	15	15	15	0.5	12.5
10									1	2.5
15									1.5	3.75
20									2	5
25									2.5	6.25
30									3	7.5
40									4	10
50									5	12.5
75									7.5	18.75
100									10	25
150									15	37.5
200									20	50
300									30	75
400									40	100
500									50	75
600									60	150
800									80	200
1000									80	200
1200									80	200
1500									80	200
2000									80	200
2500									80	200
3000									80	200

Outline dimensions

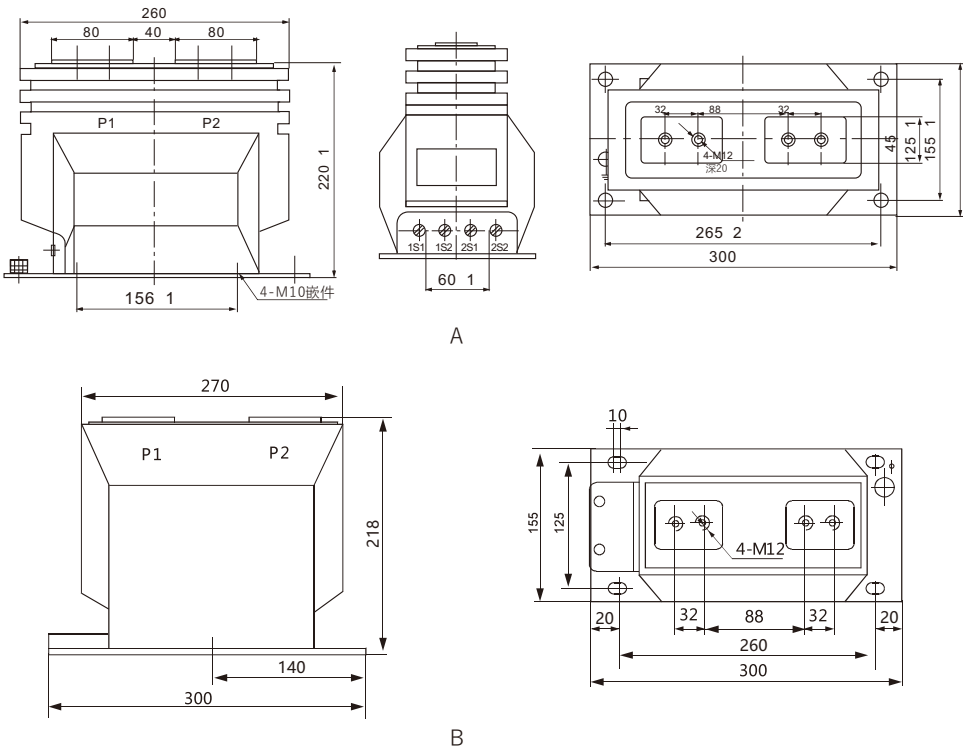LZZBJ9-10A,5~ 2000 /5 current transformer outline and mounting dimensions



LZZBJ9-10C current transformer outline and mounting dimensions

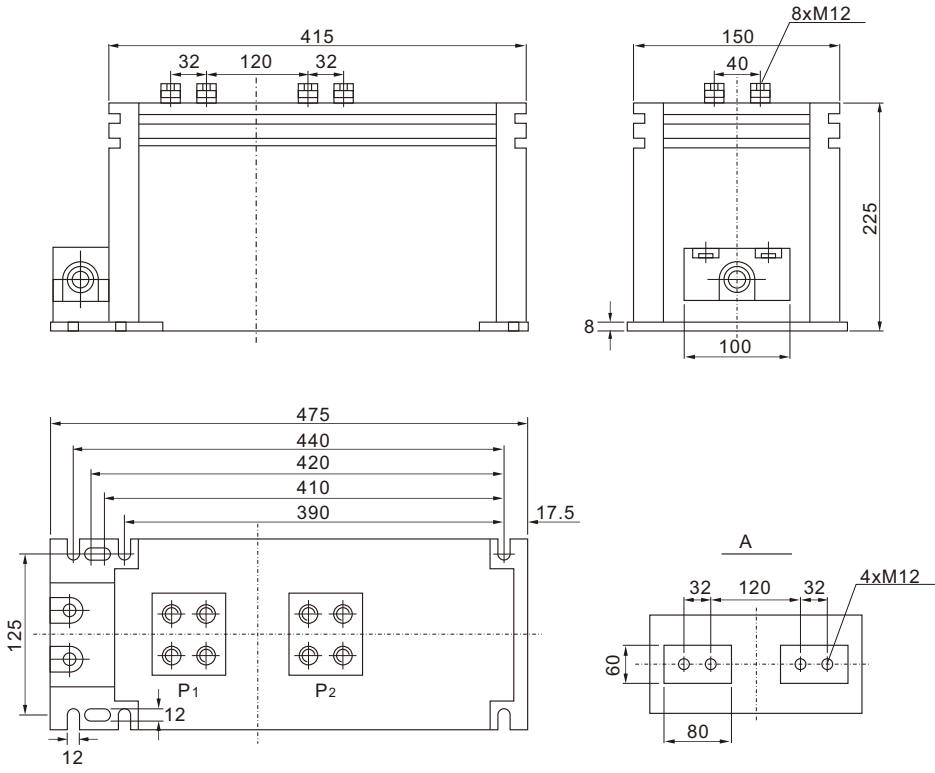


JDZ(J)-3,6,10



Single-phase, semi-enclosed voltage transformers



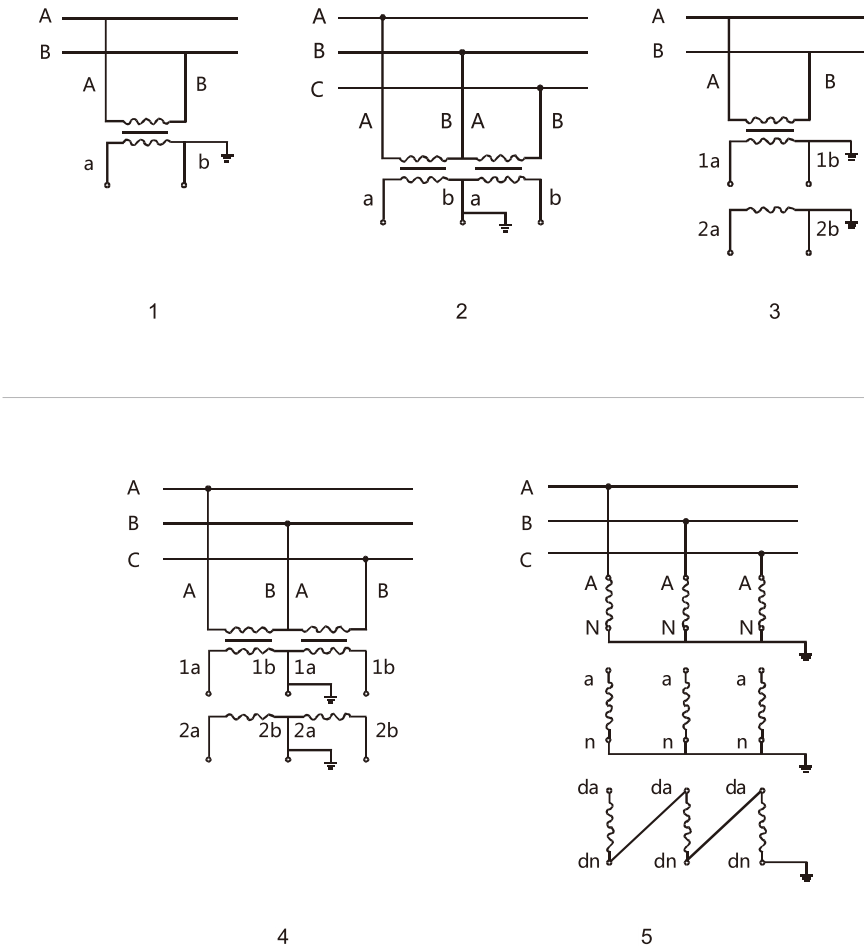Wiring Diagram



Code and implication

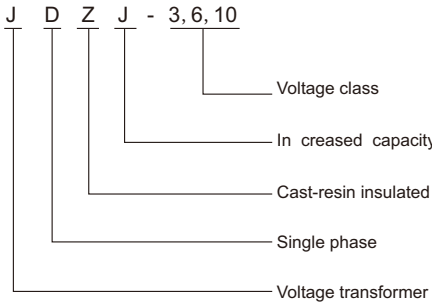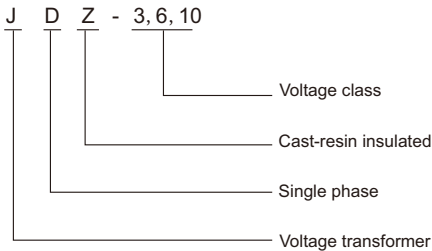


Technical parameters

Type	Rated voltage ratio	Accuracy classes combination	Accuracy class and rated output				Thermal limit output capacity	Power frequency withstand voltage
			0.2	0.5	1	3		
JDZ-3	3/0.1		20	30	50	80	200	24
JDZ-6	6/0.1		30	50	80	200	300	32
JDZ-10	10/0.1		30	80	150	300	500	42

Type	Rated voltage ratio	Accuracy classes combination	Accuracy class and rated output				Residual voltage winding	Thermal limit output capacity
			0.2	0.5	1	3	6P	
JDZJ-3	$\frac{3}{\sqrt{3}} / \frac{0.1}{\sqrt{3}} / \frac{0.1}{3}$	0.2/6P 0.5/6P	15	30	50	80	50	200
JDZJ-6	$\frac{6}{\sqrt{3}} / \frac{0.1}{\sqrt{3}} / \frac{0.1}{3}$		15	30	80	200	100	200
JDZJ-10	$\frac{10}{\sqrt{3}} / \frac{0.1}{\sqrt{3}} / \frac{0.1}{3}$		20	40	80	200	100	300

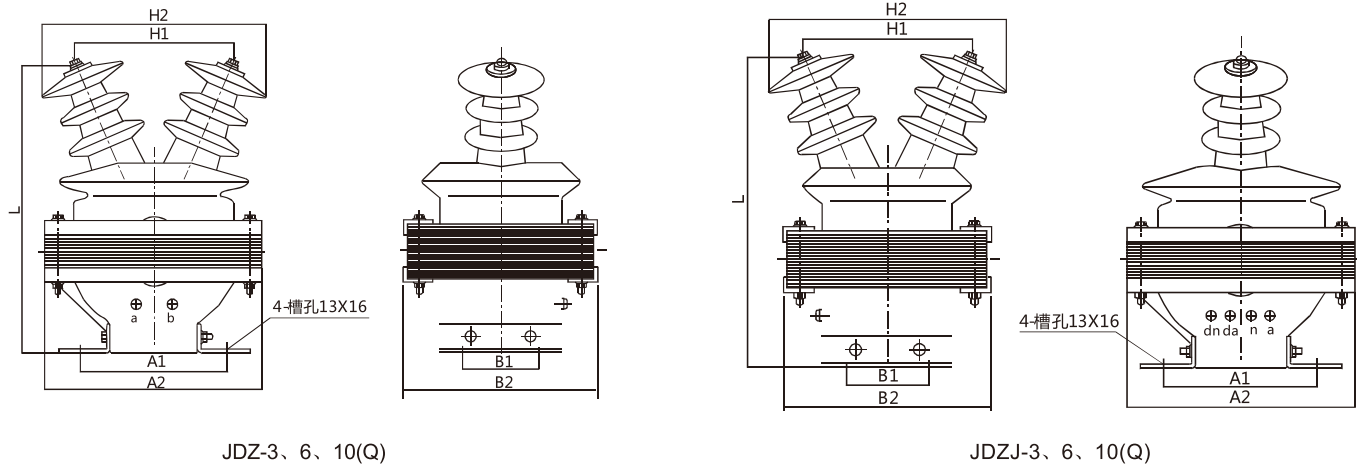Outline dimensions




型号Type	H1	H2	L	A1	A2	B1	B2
JDZ-10(Q)	180	250	315	170	240	90	220
JDZ-3、6(Q)	160	215	285	168	216	90	192


型号Type	H1	H2	L	B1	B2	A1	A2
JDZJ-10(Q)	180	250	315	90	220	170	240
JDZJ-3、6(Q)	160	215	285	90	192	168	216

JDZ10-3,6,10

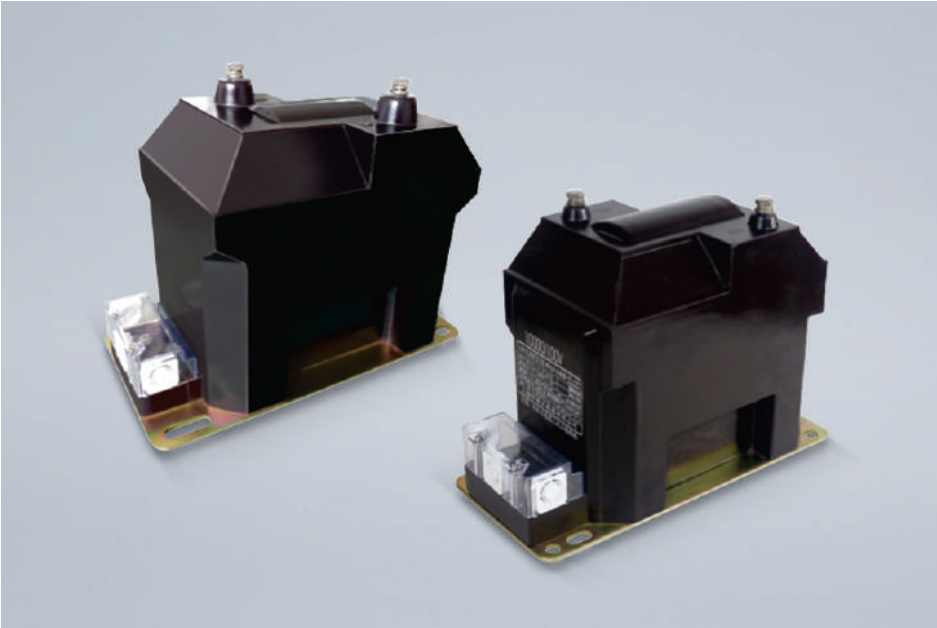Single-phase, fully-enclosed voltage transformers




Code and implication

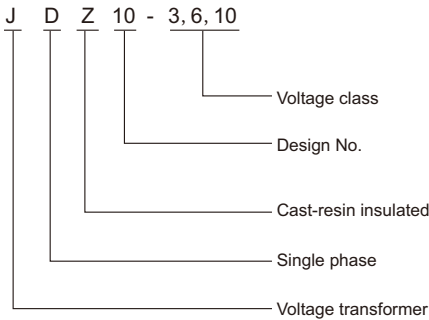


Technical parameters

Type	Rated voltage ratio	Accuracy classes combination	Accuracy class and rated output			Thermal limit output capacity	Power frequency withstand voltage
			0.2	0.5	1		
JDZ10-3(RZL10)	3/0.1		15	30	50	200	24
JDZ10-6(RZL10)	6/0.1		15	30	60	200	32
JDZ10-10(RZL10)	10/0.1		15	30	60	200	42

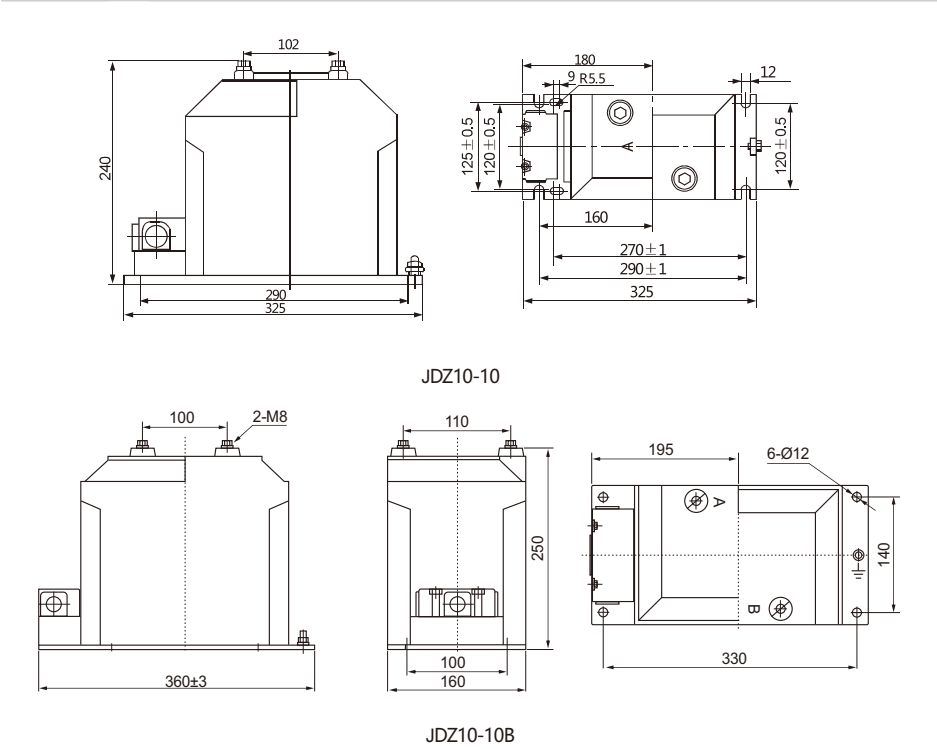Outline dimensions



Wiring Diagram

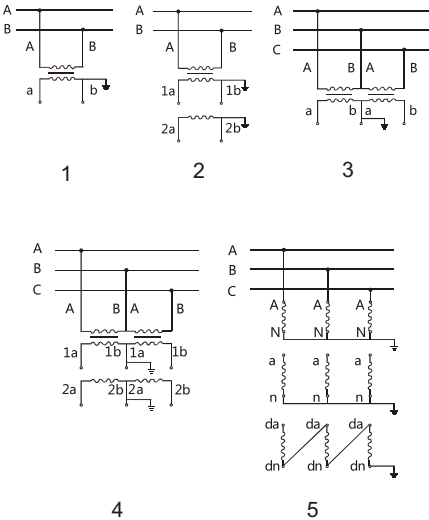


JDZX9-6/10

Voltage transformers



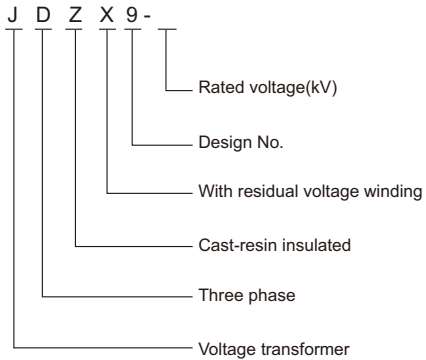
Code and implication




Technical parameters

Type	Rated voltage ratio	Accuracy class and rated output COSØ=0.8					Thermal limiting output(VA)	Rated insulation level(kV)
		0.2	0.5	1	3P	3P 6P		
JDZX9-6	6000/100/100/100/3	15	30	100	100	100	400	7.2/32/60
JDZX9-10	10000/100/100/100/3	25	50	180	100	100	400	12/42/75

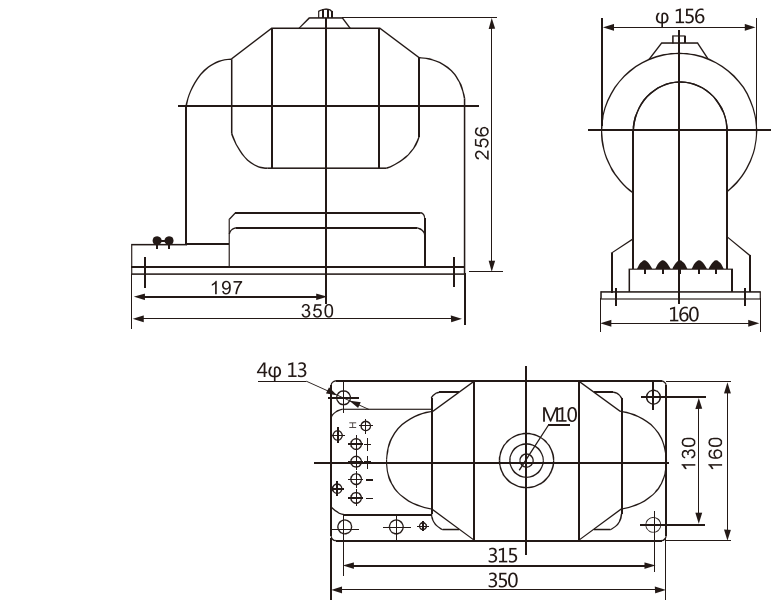Outline dimensions



Wiring Diagram




JDZX10-10

Voltage transformers



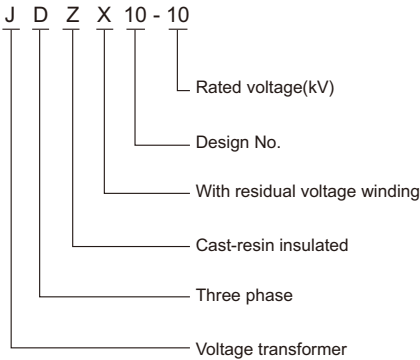
Code and implication




Technical parameters

Type	Rated voltage ratio	Accuracy class and rated output COSØ=0.8					Thermal limiting output(VA)	Rated insulation level(kV)
		0.2	0.5	1	3P	3P 6P		
JDZX10-10 (REL 10)	$\frac{6000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	15	30	60	50	50	200	7.2/32/60
	$\frac{10000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	15	30	60	50	50	200	12/42/75

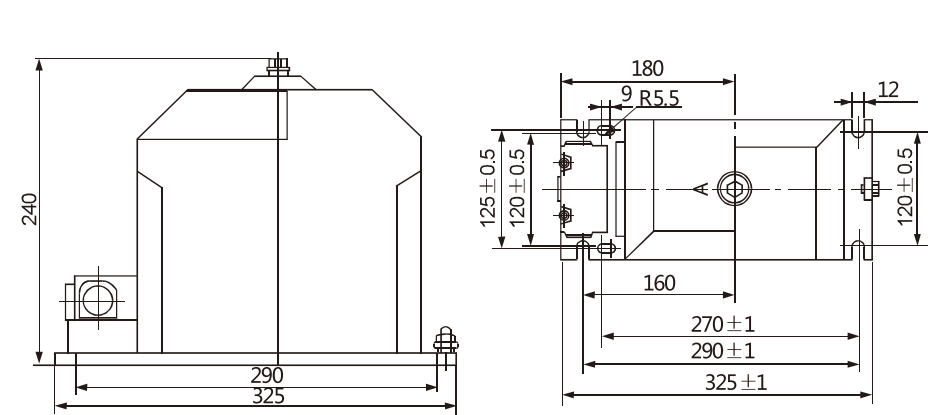Outline dimensions



Wiring Diagram




JDZ6-10R/6R

Voltage transformers



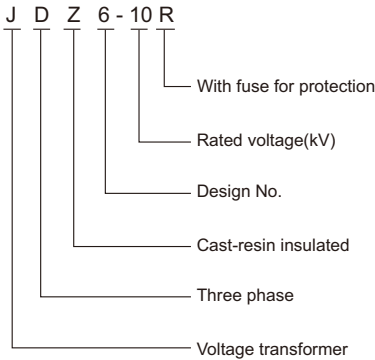Code and implication




Technical parameters


The voltage transformers are in accordance with GB1207 and IEC60044-2 standards
Rated insulation level 12/42/75, 7.2/32/60kV
Rated frequency 50Hz or 60Hz

Type	Rated voltage ratio	Accuracy classes combination	Accuracy class and rated output			Thermal limit output capacity
			0.2	0.5	1	
JDZ6-10R JDZ6-6R	10/0.1 6/0.1	0.2 0.5 1.0	30	50	100	400
JDZF6-10R JDZF6-6R	10/0.1/0.1 6/0.1/0.1	0.2/0.5	15	20	30	2×200
JDZU6-10R JDZU6-6R	10/0.1/0.22 6/0.1/0.22	0.2 0.5	20	40		Max 400

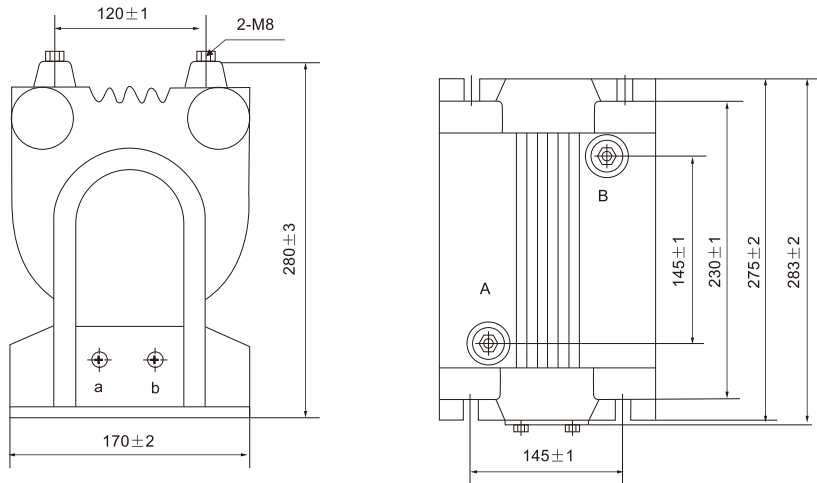Outline dimensions



Wiring Diagram

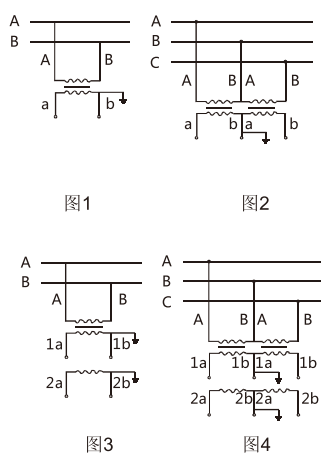


JDZC-6/10(DC)

Voltage transformers



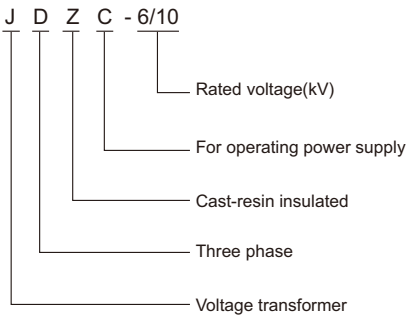
Code and implication




Technical parameters

Type	Rated voltage ratio	Rated secondary output (VA)		Accuracy classes combination	Rated insulation level(kV)
		1a1b(100v)	2a2b(220v)		
JDZC-6(DC)	6000/100/220	30	500-600	0.5/3	7.2/32/60
JDZC-10(DC)	10000/100/220	50	800,1000		
		80	2000,3000		

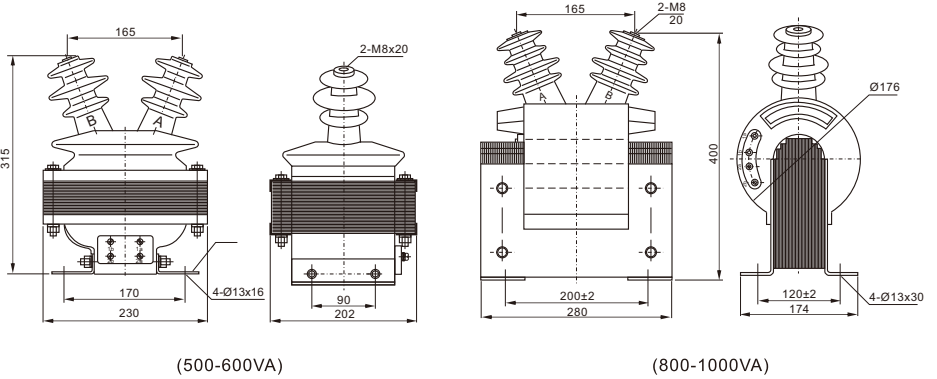Outline dimensions



Wiring Diagram

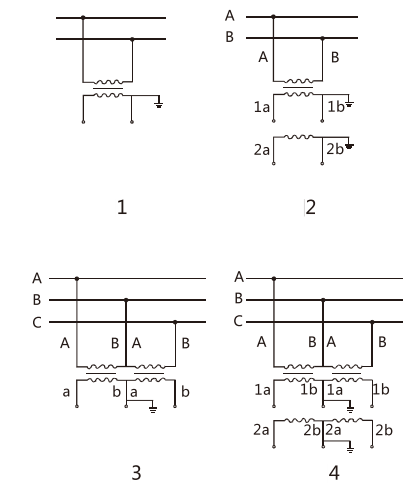


JSZV12-10R

Voltage transformers



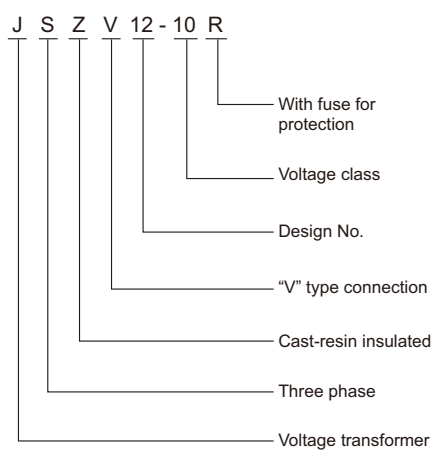Code and implication




Technical parameters


The voltage transformers are in accordance with GB1207 and IEC60044-2 standards
Rated insulation level 12/42/75, 7.2/32/60kV
Rated frequency 50Hz or 60Hz

Type	Rated voltage ratio	Accuracy classes combination	Accuracy class and rated output			Thermal limit output capacity
			0.2	0.5	1	
JSZV12-10R	10/0.1	0.2 0.5 1.0	30	60	100	600

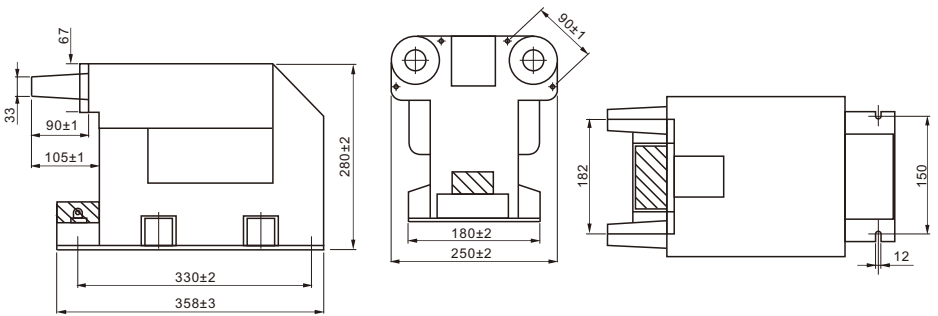Outline dimensions



Wiring Diagram

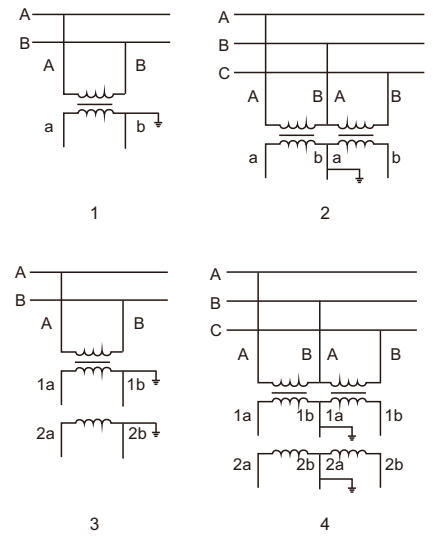

JSZV18-10R

Voltage transformers




Technical parameters


The voltage transformers are in accordance with GB1207 and IEC60044-2 standards
Rated insulation level 12/42/75, 7.2/32/60kV
Rated frequency 50Hz or 60Hz

Type	Rated voltage ratio	Accuracy classes combination	Accuracy class and rated output			Thermal limit output capacity
			0.2	0.5	1	
JSZV18-10R	10/0.1	0.2 0.5 1.0	50	100	150	2x400
JSZV18-10R	10/0.1/0.22	0.2 0.5 1.0	40	80	150	2x300

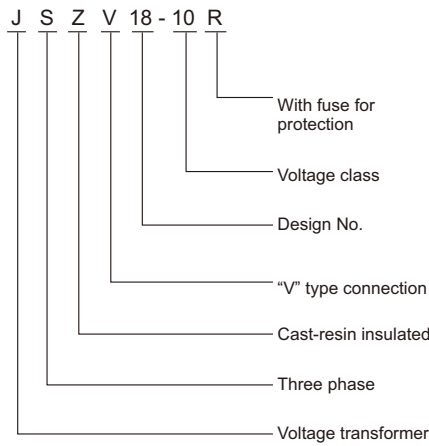Code and implication




Wiring Diagram

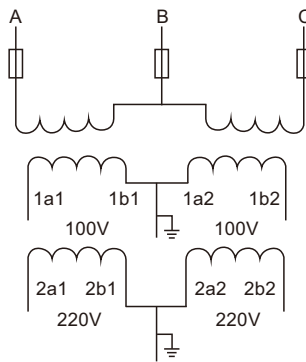

JSZV18-10R wiring diagram

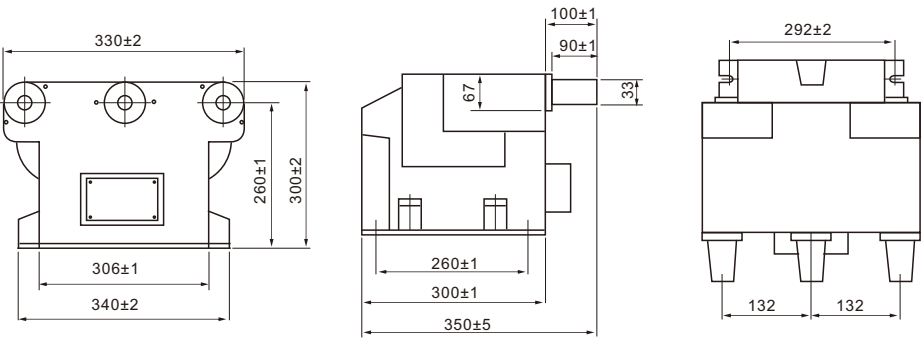
Outline dimensions



BSMJ Low Voltage Power Capacitor



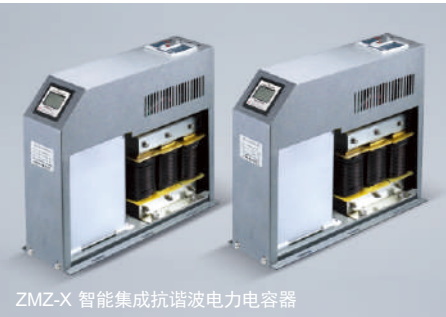ZMZ-C Intelligent Power Capacitor



ZMX-X 智能集成抗谐波电力电容器



ZM-APF Active Power Filter



CKSG Power Reactor



ZMFK 智能复合开关 (同步开关型)



JKL5CF Reactive Power Compensation Controller



DZ47-63 MCB



SZM1 系列塑料外壳式断路器



ZMW45 ACB



ZMQ2M Double Power Switch



CJ20 系列交流接触器

ZHIMING GROUP CO.,LTD.

www.zmgs.com